

ARTO LED 64W 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	020490
Ingress protection:	IP20
Impact resistance:	IK07
Luminous flux [lm]*:	5250
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	powder coated steel
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

Recessed modular fitting with an integrated energy-saving LED GO! panel, made of white powder coated steel. Opal diffuser made of polystyrene ensures even light distribution. The fitting's central part is a blende, which is a component of a modular ceiling. Due to it the fitting can be perfectly matched with the interior's design.

APPLICATION

Multipurpose fitting intended for mounting in modular ceilings in offices, representative rooms or rooms of general use. It can be also used as the main light source and it is suitable for work requiring sight focus. The fitting will be perfect as a new application or while replacing the traditional fluorescent fittings with energy-saving LED solutions.


ARTO LED 64W 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	020490	Diffuser type:	OPAL
Light source:	LED module	Material of the body:	powder coated steel
Nominal power [W]:	64	Colour of the body:	white
Rated power of the luminaire [W]:	68	Dimensions (H/W/T/S) [mm]:	655/650/87
Supply voltage [V]:	220-240	Mounting dimensions [mm]:	595/595
Frequency [Hz]:	50 - 60	Impact resistance:	IK07
Luminous flux [lm]:	5250	Ingress protection:	IP20
Luminous efficacy [lm/W]:	77	Mounting version:	recessed
Energy efficiency class:	F	Working temperature [°C]:	from -20 to +35
Electrical protection class:	I	Net weight [kg]:	5.200
Colour temperature [K]:	4000	Warranty [years]:	2
Colour rendering index:	>80	CE certificate:	144/2017
SDCM:	≤ 3	EAN:	5905963020490
Power factor:	0.97	Category type:	louvres
LED lifespan L70B50 [h]:	50000	Manual:	Download PDF
Diffuser material:	PS		

LIGHT CURVES

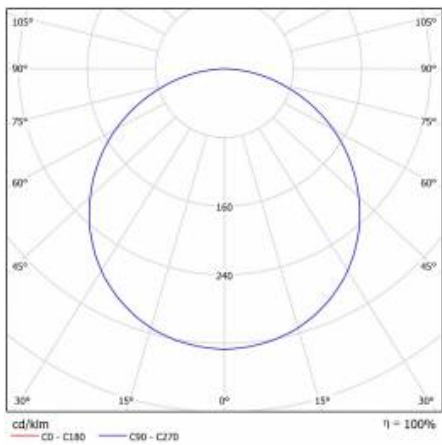


ARTO LED 64W 4000K

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white

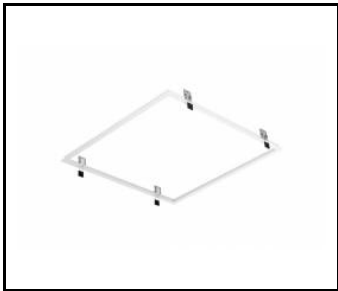

Plasterboard recessing kit 630x630 white (999543)

Card creation date: 22 October 2019
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 144/2017