


# ARTO LED N 28W 3000K

## DETAILED CARD

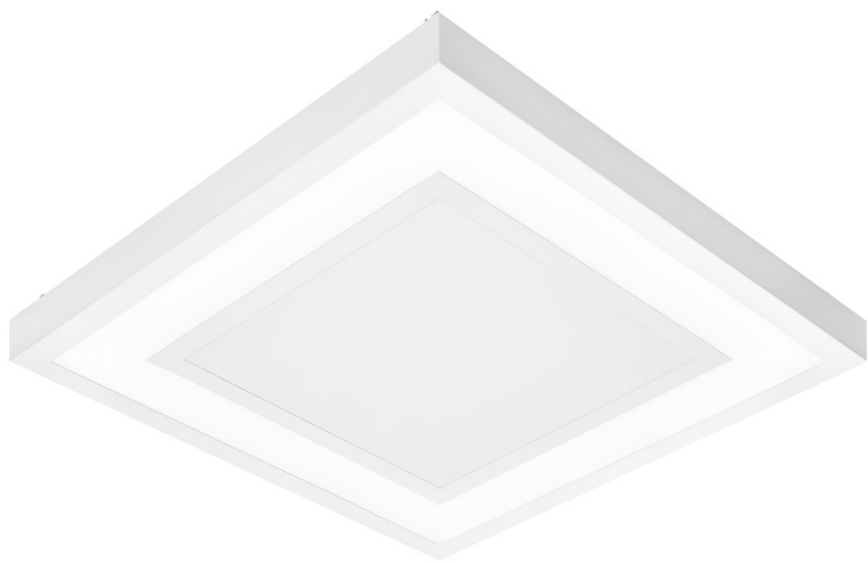

### TECHNICAL PARAMETERS

Index:	x
Ingress protection:	IP20
Impact resistance:	IK07
Luminous flux [lm]*:	2350 - 5700
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E; F
Material of the body:	stal malowana proszkowo
Diffuser material:	PS
Diffuser type:	OPAL

### CHARACTERISTICS

Recessed modular fitting with an integrated energy-saving LED GO! panel, made of white powder coated steel. Opal diffuser made of polystyrene ensures even light distribution. The fitting's central part is a blende, which is a component of a modular ceiling. Due to it the fitting can be perfectly matched with the interior's design.

### APPLICATION

Multipurpose fitting intended for mounting in modular ceilings in offices, representative rooms or rooms of general use. It can be also used as the main light source and it is suitable for work requiring sight focus. The fitting will be perfect as a new application or while replacing the traditional fluorescent fittings with energy-saving LED solutions.


# ARTO LED N 28W 3000K

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	x	Material of the body:	stal malowana proszkowo
Light source:	moduł LED	Colour of the body:	biały; czarny
Nominal power [W]:	28	Dimensions (H/W/T/S) [mm]:	655/650/87; 675/675/80; 675/675/80/1250
Rated power of the luminaire [W]:	28	Mounting dimensions [mm]:	595/595; 598/598
Supply voltage [V]:	220-240	Impact resistance:	IK07
Frequency [Hz]:	50-60	Ingress protection:	IP20
Luminous flux [lm]:	2350 - 5700	Mounting version:	natynkowy; podtynkowy; zwieszany
Energy efficiency class:	E; F	Working temperature [°C]:	od -17 do +35; od -20 do +35; od -25 do +35
Electrical protection class:	I	DIMM DALI:	yes
Colour temperature [K]:	3000; 4000	Net weight [kg]:	5.200; 6.000
Colour rendering index:	>80	Warranty [years]:	2
SDCM:	≤ 3	CE certificate:	<a href="#">142/2017; 143/2017; 144/2017</a>
Power factor:	0.97	EAN:	x
LED lifespan L70B50 [h]:	50000	Category type:	louvres
Diffuser material:	PS	Manual:	<a href="#">Download PDF</a>
Diffuser type:	OPAL		

### LIGHT CURVES

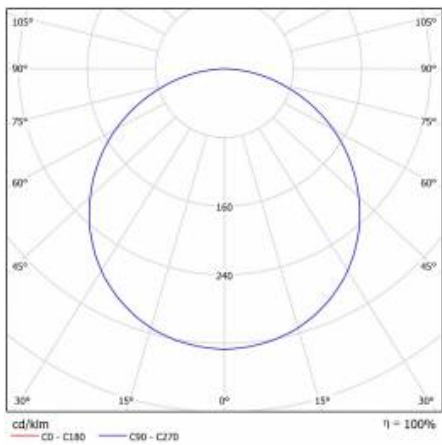


# ARTO LED N 28W 3000K

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white

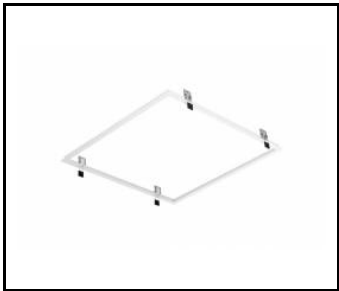

Plasterboard recessing kit 630x630 white (999543)

Card creation date: 22 October 2019

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 142/2017