DOBLO LED 36W WHITE 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	36
Luminous flux [lm]*:	3850
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

Decorative lighting fitting with the effect of indirect light constituting 30% of the total light output of the luminaire. It was made of powder coated sheet steel and equipped with an economical LED GO! panel. Specification: color temperature: 3000K/4000K; CRI>80; LED panels lifespan 50 000h (L70B50) for ta=25°C. DIMM/DALI options available on request.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. It is perfect for representational spaces.


DOBLO LED 36W WHITE 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	094019	**Material of the body:**	powder coated steel
Light source:	LED module	**Colour of the body:**	white
Nominal power [W]:	36	**Dimensions (H/W/T/S) [mm]:**	1180/200/52
Rated power of the luminaire [W]:	38	**Impact resistance:**	IK07
Supply voltage [V]:	220-240	**Ingress protection:**	IP20
Frequency [Hz]:	50 - 60	**Mounting version:**	suspended
Luminous flux [lm]:	3850	**Working temperature [°C]:**	from -15 to +35
Luminous efficacy [lm/W]:	101	**Net weight [kg]:**	6.600
Energy efficiency class:	E	**Warranty [years]:**	5
Electrical protection class:	I	**CE certificate:**	371/2023
Colour temperature [K]:	4000	**EAN:**	5905963094019
Color rendering index (Ra) >:	80	**Category type:**	troffers
SDCM:	3	**Luminaire rated power 0min [W]:**	36
LED lifespan L70B50 [h]:	50000	**Manual:**	Download PDF
Diffuser material:	PS	**Plik LDT:**	Download
Diffuser type:	OPAL		

LIGHT CURVES

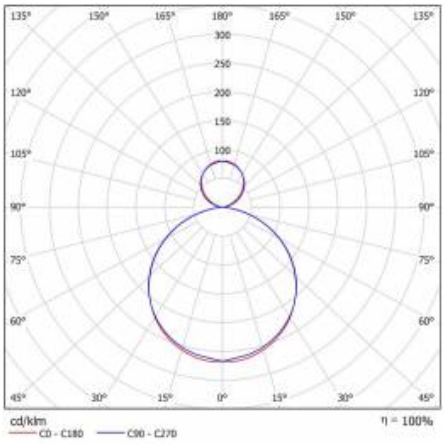

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 371/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl