DOBLO LED 36W DALI WHITE 3000K

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	36
Luminous flux [lm]*:	3550
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	F
Material of the body:	powder coated steel
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

Decorative lighting fitting with the effect of indirect light constituting 30% of the total light output of the luminaire. It was made of powder coated sheet steel and equipped with an economical LED GO! panel. Specification: color temperature: 3000K/4000K; CRI>80; LED panels lifespan 50 000h (L70B50) for ta=25°C. DIMM/DALI options available on request.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. It is perfect for representational spaces.


DOBLO LED 36W DALI WHITE 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	094088	**Material of the body:**	powder coated steel
Light source:	LED module	**Colour of the body:**	white
Nominal power [W]:	36	**Dimensions (H/W/T/S) [mm]:**	1180/200/52
Rated power of the luminaire [W]:	38	**Impact resistance:**	IK07
Supply voltage [V]:	220-240	**Ingress protection:**	IP20
Frequency [Hz]:	50 - 60	**Mounting version:**	suspended
Luminous flux [lm]:	3550	**Working temperature [°C]:**	from -20 to +35
Luminous efficacy [lm/W]:	93	**DIMM DALI:**	yes
Energy efficiency class:	F	**Net weight [kg]:**	6.700
Electrical protection class:	I	**Warranty [years]:**	5
Colour temperature [K]:	3000	**CE certificate:**	371/2023
Color rendering index (Ra) >:	80	**EAN:**	5905963094088
SDCM:	3	**Category type:**	troffers
LED lifespan L70B50 [h]:	50000	**Luminaire rated power 0min [W]:**	36
Diffuser material:	PS	**Manual:**	Download PDF
Diffuser type:	OPAL	**Plik LDT:**	Download

LIGHT CURVES

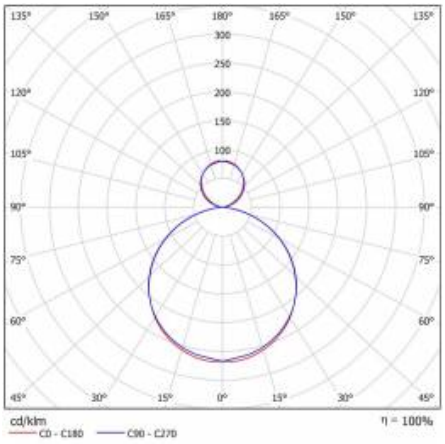

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 371/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl