

DOBLO LED 36W GREY 3000K

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	36
Luminous flux [lm]*:	3550
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	powder coated steel
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

Decorative lighting fitting with the effect of indirect light constituting 30% of the total light output of the luminaire. It was made of powder coated sheet steel and equipped with an economical LED GO! panel. Specification: color temperature: 3000K/4000K; CRI>80; LED panels lifespan 50 000h (L70B50) for $t_a=25^{\circ}\text{C}$. DIMM/DALI options available on request.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. It is perfect for representational spaces.


DOBLO LED 36W GREY 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	36	LED lifespan L70B50 [h]:	50000
Index:	094040	Diffuser material:	PS
Colour temperature [K]:	3000	Material of the body:	powder coated steel
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	1180/200/52
Luminous flux [lm]:	3550	Impact resistance:	IK07
Diffuser type:	OPAL	Ingress protection:	IP20
Rated power of the luminaire [W]:	38	Mounting version:	suspended
Colour of the body:	grey	Working temperature [°C]:	from -15 to +35
Supply voltage [V]:	220-240	Net weight [kg]:	6.600
Frequency [Hz]:	50 - 60	Warranty [years]:	5
Energy efficiency class:	F	CE certificate:	371/2023
Luminous efficacy [lm/W]:	93	EAN:	5905963094040
Electrical protection class:	I	Category type:	louvres
Colour rendering index:	>80	Luminaire rated power P_{min} [W]:	36
SDCM:	≤ 3	Manual:	Download PDF
		Plik LDT:	Download

LIGHT CURVES

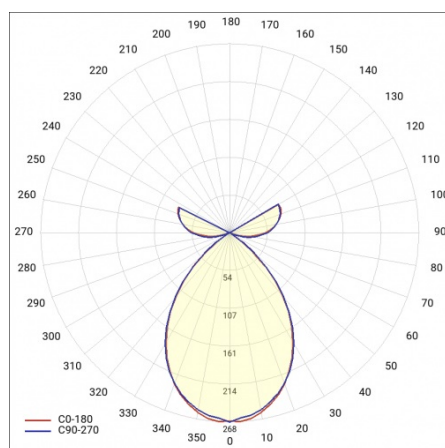

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 371/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl