

DOBLO LED 50W WHITE 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	50
Luminous flux [lm]*:	5350
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

Decorative lighting fitting with the effect of indirect light constituting 30% of the total light output of the luminaire. It was made of powder coated sheet steel and equipped with an economical LED GO! panel. Specification: color temperature: 3000K/4000K; CRI>80; LED panels lifespan 50 000h (L70B50) for $t_a=25^{\circ}\text{C}$. DIMM/DALI options available on request.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. It is perfect for representational spaces.


DOBLO LED 50W WHITE 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	094033	Diffuser type:	OPAL
Light source:	LED module	Material of the body:	powder coated steel
Nominal power [W]:	50	Colour of the body:	white
Rated power of the luminaire [W]:	54	Dimensions (H/W/T/S) [mm]:	1180/200/52
Supply voltage [V]:	220-240	Impact resistance:	IK07
Frequency [Hz]:	50 - 60	Ingress protection:	IP20
Luminous flux [lm]:	5350	Mounting version:	suspended
Luminous efficacy [lm/W]:	99	Working temperature [°C]:	from -15 to +35
Energy efficiency class:	E	Net weight [kg]:	6.600
Electrical protection class:	I	Warranty [years]:	5
Colour temperature [K]:	4000	CE certificate:	371/2023
Colour rendering index:	>80	EAN:	5905963094033
SDCM:	≤ 3	Category type:	louvres
LED lifespan L70B50 [h]:	50000	Luminaire rated power Φ_{min} [W]:	50
Diffuser material:	PS	Manual:	Download PDF

LIGHT CURVES

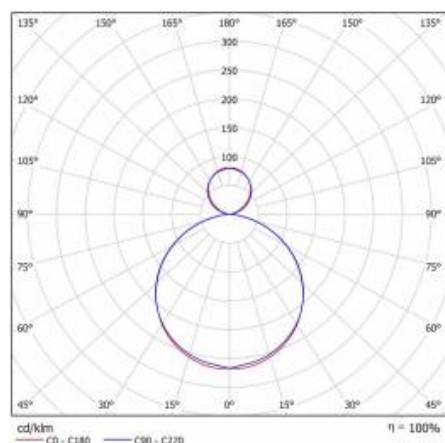

Card creation date: 02 December 2019

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 371/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl