

DOBLO LED 50W DALI WHITE 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	50
Luminous flux [lm]*:	5350
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

Decorative lighting fitting with the effect of indirect light constituting 30% of the total light output of the luminaire. It was made of powder coated sheet steel and equipped with an economical LED GO! panel. Specification: color temperature: 3000K/4000K; CRI>80; LED panels lifespan 50 000h (L70B50) for ta=25°C. DIMM/DALI options available on request.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. It is perfect for representational spaces.


DOBLO LED 50W DALI WHITE 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	50	LED lifespan L70B50 [h]:	50000
Index:	094118	Diffuser material:	PS
Colour temperature [K]:	4000	Material of the body:	powder coated steel
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	1180/200/52
Luminous flux [lm]:	5350	Impact resistance:	IK07
Diffuser type:	OPAL	Ingress protection:	IP20
Rated power of the luminaire [W]:	54	Mounting version:	suspended
Colour of the body:	white	Working temperature [°C]:	from -20 to +35
Supply voltage [V]:	220-240	Net weight [kg]:	6.700
DIMM DALI:	yes	Warranty [years]:	5
Frequency [Hz]:	50 - 60	CE certificate:	371/2023
Energy efficiency class:	E	EAN:	5905963094118
Luminous efficacy [lm/W]:	99	Category type:	louvres
Electrical protection class:	I	Luminaire rated power P_{min} [W]:	50
Colour rendering index:	>80	Manual:	Download PDF
SDCM:	≤ 3	Pliik LDT:	Download

LIGHT CURVES

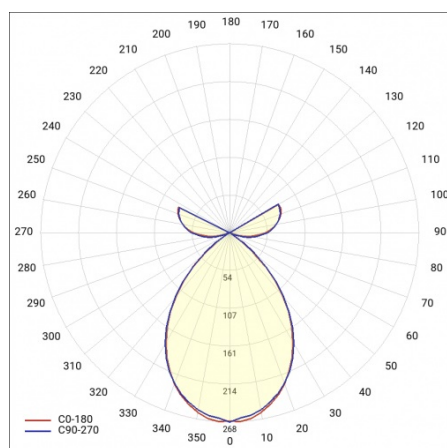

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 371/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl