

# DOBLO LED 50W GREY 3000K

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP20
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	50
<b>Luminous flux [lm]*:</b>	4950
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	powder coated steel
<b>Diffuser material:</b>	PS
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

Decorative lighting fitting with the effect of indirect light constituting 30% of the total light output of the luminaire. It was made of powder coated sheet steel and equipped with an economical LED GO! panel. Specification: color temperature: 3000K/4000K; CRI>80; LED panels lifespan 50 000h (L70B50) for ta=25°C. DIMM/DALI options available on request.

## APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. It is perfect for representational spaces.


# DOBLO LED 50W GREY 3000K

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	094064	<b>Material of the body:</b>	powder coated steel
<b>Light source:</b>	LED module	<b>Colour of the body:</b>	grey
<b>Nominal power [W]:</b>	50	<b>Dimensions (H/W/T/S) [mm]:</b>	1180/200/52
<b>Rated power of the luminaire [W]:</b>	54	<b>Impact resistance:</b>	IK07
<b>Supply voltage [V]:</b>	220-240	<b>Ingress protection:</b>	IP20
<b>Frequency [Hz]:</b>	50 - 60	<b>Mounting version:</b>	suspended
<b>Luminous flux [lm]:</b>	4950	<b>Working temperature [°C]:</b>	from -15 to +35
<b>Luminous efficacy [lm/W]:</b>	91	<b>Net weight [kg]:</b>	6.600
<b>Energy efficiency class:</b>	F	<b>Warranty [years]:</b>	5
<b>Electrical protection class:</b>	I	<b>CE certificate:</b>	<a href="#">371/2023</a>
<b>Colour temperature [K]:</b>	3000	<b>EAN:</b>	5905963094064
<b>Color rendering index (Ra) &gt;:</b>	80	<b>Category type:</b>	troffers
<b>SDCM:</b>	3	<b>Luminaire rated power <math>\Phi_{min}</math> [W]:</b>	50
<b>LED lifespan L70B50 [h]:</b>	50000	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Diffuser material:</b>	PS	<b>Plik LDT:</b>	<a href="#">Download</a>
<b>Diffuser type:</b>	OPAL		

## LIGHT CURVES

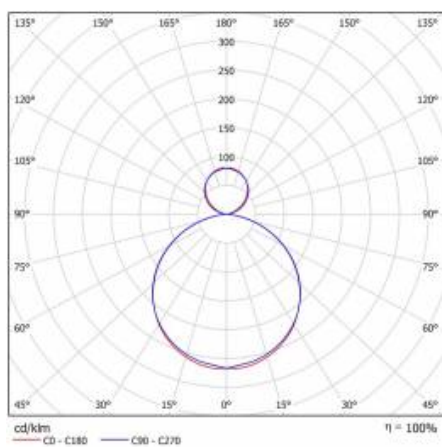

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 371/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl