

# MIMO 2 LED BASIC 1510MM 4550LM IP66 840 (33W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	100857
<b>Ingress protection:</b>	IP66
<b>Impact resistance:</b>	IK06
<b>Nominal power [W]:</b>	33
<b>Luminous flux [lm]*:</b>	4550
<b>Colour temperature [K]:</b>	4000
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 5
<b>Energy efficiency class:</b>	D
<b>Material of the body:</b>	PC

## CHARACTERISTICS

MIMO 2 LED BASIC represents the new generation of hermetic LED luminaires with very high IP66 tightness. The luminaire uses modern concepts to improve light distribution and temperature balance. Its design involved both proven solutions that affect high efficiency and durability, as well as efficient LED modules offering the best lighting level required and energy savings. The multilayer shade has been made of UV-resistant polycarbonate.

## APPLICATION

The multifunctional LED luminaire is designed for use in areas with increased dust and humidity. It is particularly suitable for industrial conditions, car parks (underground and multi-storey ones), sports stadiums, warehouses, transport terminals and underground passages. The luminaire is used both in new applications, as well as in replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended installation using standard equipment. The luminaire is intended for general areas inside buildings – store rooms and storage rack areas as well as cold stores included in tables 5.4 and 5.5 of the EN12464 standard; for indoor traffic zones included in table 5.1 of the EN12464 standard and for parking areas and as lighting of railway installations included in table 5.34 and 5.53 of the EN12464 standard, excluding ticket and luggage offices, counters, waiting rooms, entrance halls and lounges.


# MIMO 2 LED BASIC 1510MM 4550LM IP66 840 (33W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	33	Mounting dimensions [mm]:	950
Index:	100857	Impact resistance:	IK06
Colour temperature [K]:	4000	Ingress protection:	IP66
EAN:	5905963100857	Mounting version:	surface, suspended
Luminous flux [lm]:	4550	Working temperature [°C]:	from -20 to +35
Light source:	LED module	Net weight [kg]:	0.375
Diffuser type:	MAT	Flicker procent:	100
Dimensions (H/W/T/S) [mm]:	1510/45/50	Category type:	battens
Rated power of the luminaire [W]:	38.40	Operating mode:	M
Energy efficiency class:	D	AC voltage range [V]:	207 - 253
Supply voltage [V]:	220-240	LED lifespan L70B50 [h]:	70000
Frequency [Hz]:	50 - 60	LED lifespan L80B20 [h]:	45000
Luminous efficacy [lm/W]:	118	LED lifespan L90B10 [h]:	22000
Electrical protection class:	II	Dimensions of bulk box (H/W/D) [mm]:	1574/107/105
Colour rendering index:	>80	CE certificate:	<a href="#">152/2023</a>
SDCM:	≤ 5	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Power factor:	0.99	Warranty [years]:	5
Surge protection [kV]:	2	Manual:	<a href="#">Download PDF</a>
Diffuser material:	PC	ETIM class:	EC000109
Material of the body:	PC	Plik LDT:	<a href="#">Download</a>
Colour of the body:	white		

## LIGHT CURVES

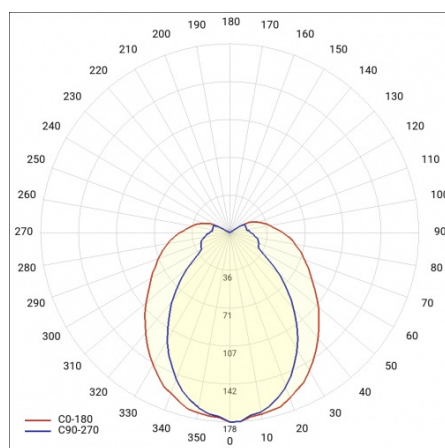

# MIMO 2 LED BASIC 1510MM 4550LM IP66 840 (33W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
100673	MIMO 2 LED - double handle (set)
800ML208	IP68 High-bay PA 6.6 connector black DL06-3A-2Y



MIMO 2 LED - double handle (set) (100673)



IP68 High-bay PA 6.6 connector black DL06-3A-2Y (800ML208)

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 152/2023