


MADERA 3 LED 620X350MM 2600LM 840 IP44 PRM GRAY (21W)

DETAILED CARD

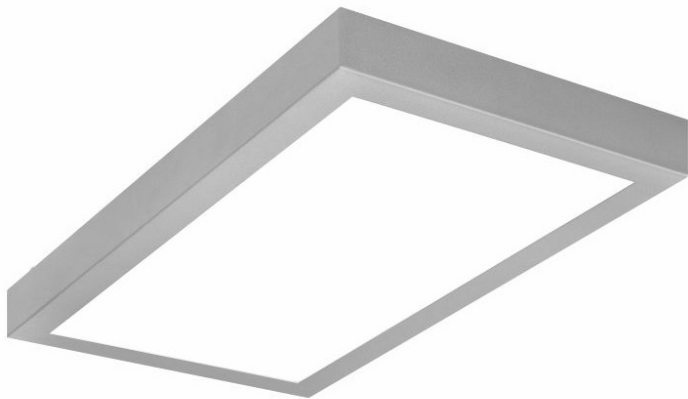

TECHNICAL PARAMETERS

| | |
|--------------------------|---------------------|
| Ingress protection: | IP44 |
| Nominal power [W]: | 21 |
| Luminous flux [lm]*: | 2600 |
| Colour rendering index: | >80 |
| Energy efficiency class: | E |
| Material of the body: | powder coated steel |
| Diffuser material: | PS |
| Diffuser type: | PRM |
| Mounting version: | surface |

CHARACTERISTICS

Surface mounted, square LED fitting with high luminous flux, made of steel sheet, powder-coated grey; equipped with energy-saving light source LED-GO!. OPAL or PRM PMMA diffuser ensures even light distribution and no glare effect. Decorative fitting available in two diffuser sizes; optional equipment: radio motion sensor (RCR).

APPLICATION

Surface-mounted luminaire intended for indoor use in offices or common rooms. Suitable as a general light source in representative rooms. Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms. Product designed for surface mounting either on ceilings or on walls.

MADERA 3 LED 620X350MM 2600LM 840 IP44 PRM GRAY (21W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------------|--------------------------------------|------------------------------|
| Index: | 497179 | Colour of the body: | grey |
| EAN: | 5905963497179 | Dimensions (H/W/T/S) [mm]: | 620/350/68 |
| Light source: | LED module | Mounting dimensions [mm]: | 265/495 |
| Nominal power [W]: | 21 | Ingress protection: | IP44 |
| Rated power of the luminaire [W]: | 23 | Mounting version: | surface |
| Supply voltage [V]: | 220-240 | Net weight [kg]: | 4.100 |
| Frequency [Hz]: | 50 - 60 | Warranty [years]: | 5 |
| Luminous flux [lm]: | 2600 | CE certificate: | 254/2023 |
| Luminous efficacy [lm/W]: | 115 | Category type: | louvres |
| Energy efficiency class: | E | Luminaire rated power P_{min} [W]: | 22.60 |
| Electrical protection class: | I | LED lifespan L70B50 [h]: | 95000 |
| Colour temperature [K]: | 4000 | LED lifespan L80B20 [h]: | 60000 |
| Colour rendering index: | >80 | LED lifespan L90B10 [h]: | 29000 |
| Diffuser material: | PS | Light distribution type: | lamertian |
| Diffuser type: | PRM | Manual: | Download PDF |
| Diffuser colour: | transparent | Plik LDT: | Download |
| Material of the body: | powder coated steel | | |

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 254/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl