LUNGO 825 LM 50 ST FI60 H250 I KL IP20 SUSPENDED ALUMINIUM 830 (10W)

DETAILED CARD



TECHNICAL PARAMETERS

Light source:	COB LED
Ingress protection:	IP20
Nominal power [W]:	10
Luminous flux [lm]*:	825
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
Energy efficiency class:	F
Material of the body:	aluminium
Colour of the body:	grey
Diffuser material:	PMMA

CHARACTERISTICS

The family of lungo luminaires will make each interior stylish and original. The option to combine different sizes and colours of luminaires allows creating original compositions which will be a decorative embellishment of rooms arranged in a modern way.

APPLICATION

The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.


LUNGO 825 LM 50 ST FI60 H250 I KL IP20 SUSPENDED ALUMINIUM 830 (10W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	COB LED	**Optics material:**	PMMA
Nominal power [W]:	10	**Optics:**	lens
Supply voltage [V]:	220-240	**Material of the body:**	aluminium
Frequency [Hz]:	50 - 60	**Colour of the body:**	grey
Luminous flux [lm]:	825	**Dimensions (H/W/T/S) [mm]:**	60/250/1500
Luminous efficacy [lm/W]:	82	**Ingress protection:**	IP20
Energy efficiency class:	F	**Mounting version:**	suspended
Electrical protection class:	I	**Working temperature [°C]:**	from -20 to +35
Colour temperature [K]:	3000	**Net weight [kg]:**	0.500
Color rendering index (Ra) >:	80	**CE certificate:**	229/2023
SDCM:	3	**Index:**	645853
Power factor:	0.99	**EAN:**	5905963637476
LED lifespan L70B50 [h]:	40000	**Category type:**	decorative fixtures
Beam angle [°]:	50	**Warranty [years]:**	2
Diffuser material:	PMMA	**Manual:**	Download PDF
Diffuser type:	PRM	**Plik LDT:**	Download

LIGHT CURVES

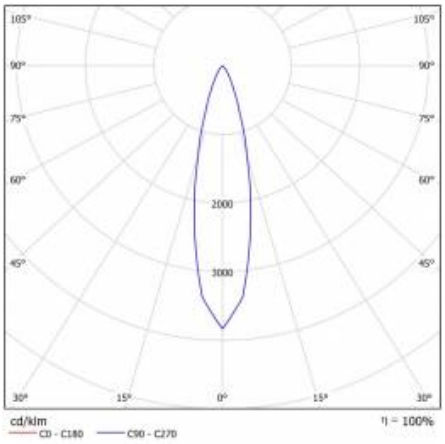

Card creation date: 17 February 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 229/2023

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl