

# LUNGO 860 LM 24 ST FI60 H250 I KL IP20 SUSPENDED WHITE 840 (10W)

DETAILED CARD



## TECHNICAL PARAMETERS

|                          |           |
|--------------------------|-----------|
| Index:                   | 645815    |
| Ingress protection:      | IP20      |
| Nominal power [W]:       | 10        |
| Luminous flux [lm]*:     | 860       |
| Colour temperature [K]:  | 4000      |
| Colour rendering index:  | >80       |
| Energy efficiency class: | F         |
| Material of the body:    | aluminium |
| Colour of the body:      | white     |
| Diffuser material:       | PMMA      |

## CHARACTERISTICS

The family of lungo luminaires will make each interior stylish and original. The option to combine different sizes and colours of luminaires allows creating original compositions which will be a decorative embellishment of rooms arranged in a modern way.

## APPLICATION

The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.


# LUNGO 860 LM 24 ST FI60 H250 I KL IP20 SUSPENDED WHITE 840 (10W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                              |         |                            |                              |
|------------------------------|---------|----------------------------|------------------------------|
| Light source:                | COB LED | Optics material:           | PMMA                         |
| Nominal power [W]:           | 10      | Optics:                    | lens                         |
| Supply voltage [V]:          | 220-240 | Material of the body:      | aluminium                    |
| Frequency [Hz]:              | 50 - 60 | Colour of the body:        | white                        |
| Luminous flux [lm]:          | 860     | Dimensions (H/W/T/S) [mm]: | 60/250/1500                  |
| Luminous efficacy [lm/W]:    | 86      | Ingress protection:        | IP20                         |
| Energy efficiency class:     | F       | Mounting version:          | suspended                    |
| Electrical protection class: | I       | Working temperature [°C]:  | from -20 to +35              |
| Colour temperature [K]:      | 4000    | Net weight [kg]:           | 0.500                        |
| Colour rendering index:      | >80     | CE certificate:            | <a href="#">161/2019</a>     |
| SDCM:                        | ≤ 3     | Index:                     | 645815                       |
| Power factor:                | 0.99    | EAN:                       | 5905963637292                |
| LED lifespan L70B50 [h]:     | 40000   | Category type:             | downlights                   |
| Beam angle [°]:              | 24      | Warranty [years]:          | 2                            |
| Diffuser material:           | PMMA    | Manual:                    | <a href="#">Download PDF</a> |
| Diffuser type:               | PRM     |                            |                              |

## LIGHT CURVES

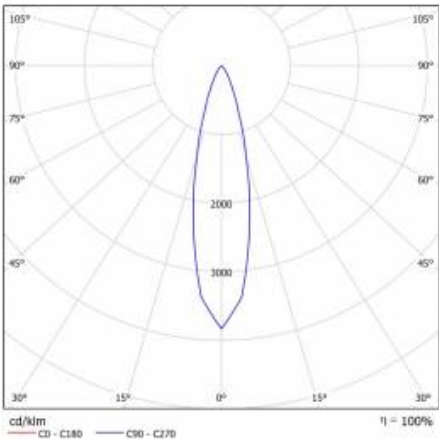

Card creation date:16 March 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 161/2019

 **LENA**  
LIGHTING

Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)