

LUNGO 860 LM 24 ST FI60 H250 I KL IP20 SUSPENDED BLACK 840 (10W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	x
Ingress protection:	IP20
Nominal power [W]:	10
Luminous flux [lm]*:	825; 860
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
Energy efficiency class:	F
Material of the body:	aluminium
Colour of the body:	aluminium; biały; czarno- złoty; czarny
Diffuser material:	PMMA

CHARACTERISTICS

The family of lungo luminaires will make each interior stylish and original. The option to combine different sizes and colours of luminaires allows creating original compositions which will be a decorative embellishment of rooms arranged in a modern way.

APPLICATION

The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.


LUNGO 860 LM 24 ST FI60 H250 I KL IP20 SUSPENDED BLACK 840 (10W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	COB LED	Optics:	soczewka pryzmatyczna
Nominal power [W]:	10	Material of the body:	aluminium
Rated power of the luminaire [W]:	10	Colour of the body:	aluminium; biały; czarno-złoty; czarny
Supply voltage [V]:	220-240	Dimensions (H/W/T/S) [mm]:	max ø60/250/1500
Frequency [Hz]:	50-60	Mounting dimensions [mm]:	36
Luminous flux [lm]:	825; 860	Ingress protection:	IP20
Luminous efficacy [lm/W]:	82	Mounting version:	natynkowy; zwieszany
Energy efficiency class:	F	Working temperature [°C]:	od -20 do +35
Electrical protection class:	I	Net weight [kg]:	0.250; 0.400; 0.500
Colour temperature [K]:	3000; 4000	CE certificate:	161/2019; 229/2023
Colour rendering index:	>80	Index:	x
SDCM:	≤ 3	EAN:	x
Power factor:	0.99	Category type:	downlights
LED lifespan L70B50 [h]:	40000	Luminaire rated power 0min [W]:	10
Beam angle [°]:	20; 24; 40; 50	ETIM class:	EC001743; EC002892
Diffuser material:	PMMA	Photobiological safety:	grupa ryzyka 1 (niskie ryzyko)
Diffuser type:	PRM	Warranty [years]:	2
Optics material:	PMMA	Manual:	Download PDF

LIGHT CURVES

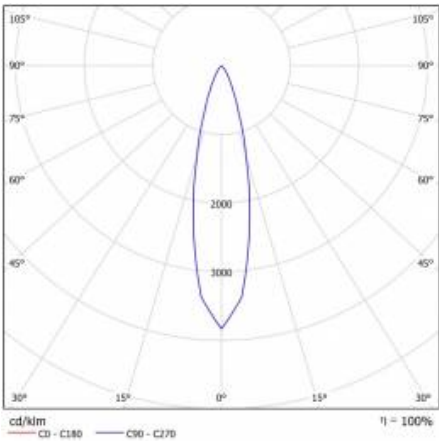

Card creation date: 24 February 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 161/2019



LENA
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl