

LUNGO 860 LM 50 ST FI60 H250 I KL IP20 SUSPENDED WHITE 840 (10W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	645495
Ingress protection:	IP20
Nominal power [W]:	10
Luminous flux [lm]*:	860
Colour temperature [K]:	4000
Colour rendering index:	>80
Energy efficiency class:	F
Material of the body:	aluminium
Colour of the body:	white
Diffuser material:	PMMA

CHARACTERISTICS

The family of lungo luminaires will make each interior stylish and original. The option to combine different sizes and colours of luminaires allows creating original compositions which will be a decorative embellishment of rooms arranged in a modern way.

APPLICATION

The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.


LUNGO 860 LM 50 ST FI60 H250 I KL IP20 SUSPENDED WHITE 840 (10W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	COB LED	Optics material:	PMMA
Nominal power [W]:	10	Optics:	lens
Supply voltage [V]:	220-240	Material of the body:	aluminium
Frequency [Hz]:	50 - 60	Colour of the body:	white
Luminous flux [lm]:	860	Dimensions (H/W/T/S) [mm]:	60/250/1500
Luminous efficacy [lm/W]:	86	Ingress protection:	IP20
Energy efficiency class:	F	Mounting version:	suspended
Electrical protection class:	I	Working temperature [°C]:	from -20 to +35
Colour temperature [K]:	4000	Net weight [kg]:	0.500
Colour rendering index:	>80	CE certificate:	161/2019
SDCM:	≤ 3	Index:	645495
Power factor:	0.99	EAN:	5905963637612
LED lifespan L70B50 [h]:	40000	Category type:	downlights
Beam angle [°]:	50	Warranty [years]:	2
Diffuser material:	PMMA	Manual:	Download PDF
Diffuser type:	PRM		

LIGHT CURVES

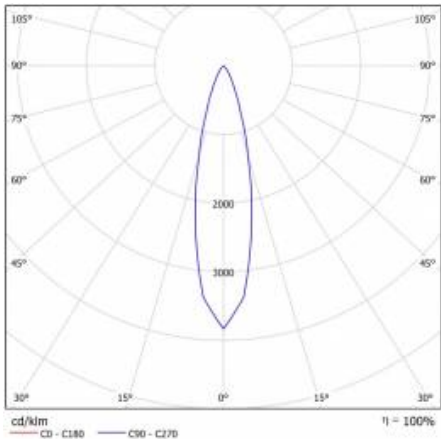

Card creation date: 08 December 2021
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 161/2019



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl