
## CAPELLA LED PLUS BOX RING 1650LM 840 IP54 WHITE (15W) 340MM ANTIVANDAL

**DETAILED CARD** 



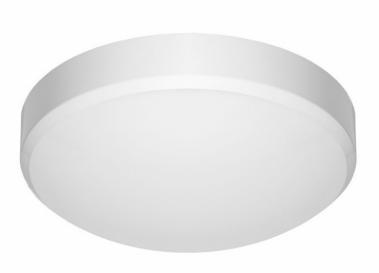

## **TECHNICAL PARAMETERS**

Index:	950971
Ingress protection:	IP54
Impact resistance:	IK06
Nominal power [W]:	15
Luminous flux [lm]*:	1650
Colour temperature [K]:	4000
SDCM:	3
Energy efficiency class:	Е
Material of the body:	ABS

### **CHARACTERISTICS**

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

This ceiling fixture is also available in the following variants:

- with a radio motion sensor.
- with a PIR presence detector,
- with DALI control,
- with CORRIDOR function (DALI + RCR),
- with Master / Slave RCR motion sensor (wireless),
- with emergency module,
- with very high ingress protection IP65,
- with ANTIVANDAL protection.

### **APPLICATION**

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.



# CAPELLA LED PLUS BOX RING 1650LM 840 IP54 WHITE (15W) 340MM ANTIVANDAL


**DETAILED CARD** 

### **TECHNICAL PARAMETERS TABLE**

Light source:	LED module
Nominal power [W]:	15
Rated power of the luminaire [W]:	16
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Luminous flux [lm]:	1650
Luminous efficacy [lm/W]:	105
Energy efficiency class:	E
Electrical protection class:	II
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Power factor:	0.94
Beam angle [°]:	120
Diffuser material:	PC
Diffuser type:	OPAL
Diffuser colour:	white
Optics material:	PMMA
Optics:	lens
Material of the body:	ABS
Colour of the body:	white
Ring colour:	white
Dimensions (H/W/T/S) [mm]:	320/105

Mounting dimensions [mm]:	158
Impact resistance:	IK06
Ingress protection:	IP54
Mounting version:	surface
Working temperature [°C]:	from -10 to +35
Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
Dimensions of single box [mm]:	342/342/122
Net weight [kg]:	0.750
Warranty [years]:	5
CE certificate:	<u>373/2023</u>
Index:	950971
EAN:	5905963950971
Category type:	bulkheads
Version:	BOX RING
Vandalproof:	yes
AC voltage range [V]:	220 - 240
UGR (4H8H):	17,9-25,2
Light distribution type:	lambertian
Dimensions of bulk box (H/W/D) [mm]:	794/1194/982
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
EDGE/BOX Colour:	white
Manual:	Download PDF
Plik LDT:	Download

## **LIGHT CURVES**






# CAPELLA LED PLUS BOX RING 1650LM 840 IP54 WHITE (15W) 340MM ANTIVANDAL

**DETAILED CARD** 

### **TECHNICAL DETAILS**



CAPELLA LED BOX ANTYWANDAL

Card creation date: 27 October 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

