

# NECTRA LITE 14W 1330LM IP44

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	502606
<b>Ingress protection:</b>	IP44/20
<b>Nominal power [W]:</b>	14
<b>Luminous flux [lm]*:</b>	1330
<b>Colour temperature [K]:</b>	4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	PC
<b>Colour of the body:</b>	white
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

Downlight type fitting with an integrated energy-saving LED source. Made of lightweight aluminium and plastic. Available in two ringcolours and three power versions. Its distinctive features are low profile, light weight and very easy and fast installation.

## APPLICATION

Designed for indoor use in common areas, passageways or to provide additional illumination in the office rooms. Due to equal surface illumination and high energy savings, it is especially recommended for public buildings.


# NECTRA LITE 14W 1330LM IP44

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	502606	<b>Ingress protection:</b>	IP44/20
<b>EAN:</b>	5905963502606	<b>Working temperature [°C]:</b>	from -20 to +40
<b>Nominal power [W]:</b>	14	<b>Category type:</b>	downlights
<b>Rated power of the luminaire [W]:</b>	14	<b>Category of application:</b>	educational institutions, HoReCa, commercial facilities
<b>Luminous flux [lm]:</b>	1330	<b>Mounting version:</b>	recessed
<b>Luminous efficacy [lm/W]:</b>	95	<b>LED lifespan L70B50 [h]:</b>	30000
<b>Energy efficiency class:</b>	E	<b>LED lifespan L80B10 [h]:</b>	20000
<b>Electrical protection class:</b>	II	<b>Photobiological safety:</b>	RG0 - exempt (no photobiological hazard)
<b>Colour temperature [K]:</b>	4000	<b>Warranty [years]:</b>	5
<b>Color rendering index (Ra) &gt;:</b>	80	<b>CE certificate:</b>	<a href="#">346/2023</a>
<b>Diffuser type:</b>	OPAL	<b>Environmental Product Declaration (EPD):</b>	<a href="#">944/2026</a>
<b>Material of the body:</b>	PC	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Colour of the body:</b>	white	<b>ISO Certificates:</b>	9001:2015. 14001:2015. 45001:2018. 50001:2018
<b>Dimensions (H/W/T/S) [mm]:</b>	145/66	<b>Plik LDT:</b>	<a href="#">Download</a>
<b>Mounting dimensions [mm]:</b>	120x130		

## LIGHT CURVES

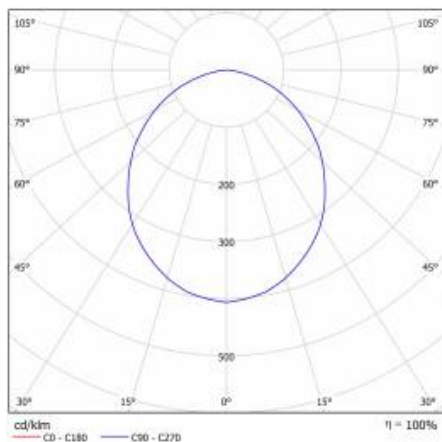

Card creation date: 29 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 346/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl