

NECTRA LITE 17W 1650LM IP44

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---------------------------------|---------|
| Index: | 502613 |
| Ingress protection: | IP44/20 |
| Nominal power [W]: | 17 |
| Luminous flux [lm]*: | 1650 |
| Colour temperature [K]: | 4000 |
| Colour rendering index: | >80 |
| Energy efficiency class: | E |
| Material of the body: | PC |
| Colour of the body: | white |
| Diffuser type: | OPAL |

CHARACTERISTICS

Downlight type fitting with an integrated energy-saving LED source. Made of lightweight aluminium and plastic. Available in two ringcolours and three power versions. Its distinctive features are low profile, light weight and very easy and fast installation.

APPLICATION

Designed for indoor use in common areas, passageways or to provide additional illumination in the office rooms. Due to equal surface illumination and high energy savings, it is especially recommended for public buildings.


NECTRA LITE 17W 1650LM IP44

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------|---------------------------|---|
| Nominal power [W]: | 17 | Ingress protection: | IP44/20 |
| Rated power of the luminaire [W]: | 17 | Working temperature [°C]: | from -20 to +40 |
| Luminous flux [lm]: | 1650 | Index: | 502613 |
| Luminous efficacy [lm/W]: | 97 | EAN: | 5905963502613 |
| Energy efficiency class: | E | Category type: | downlights |
| Electrical protection class: | II | Category of application: | HoReCa, commercial facilities, educational institutions |
| Colour temperature [K]: | 4000 | Warranty [years]: | 5 |
| Colour rendering index: | >80 | LED lifespan L70B50 [h]: | 30000 |
| Diffuser type: | OPAL | LED lifespan L80B20 [h]: | 20000 |
| Material of the body: | PC | Mounting version: | recessed |
| Colour of the body: | white | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Dimensions (H/W/T/S) [mm]: | 174/69 | Manual: | Download PDF |
| Mounting dimensions [mm]: | 145x155 | | |

LIGHT CURVES

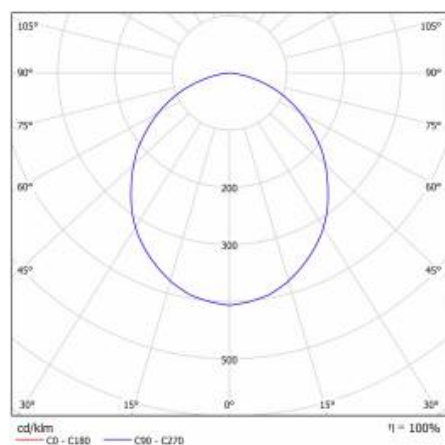

Card creation date: 23 April 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 346/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl