NECTRA LITE 17W 1650LM IP44

DETAILED CARD



TECHNICAL PARAMETERS

Index:	502613
Ingress protection:	IP44/20
Nominal power [W]:	17
Luminous flux [lm]*:	1650
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Energy efficiency class:	E
Material of the body:	PC
Colour of the body:	white
Diffuser type:	OPAL

CHARACTERISTICS

Downlight type fitting with an integrated energy-saving LED source. Made of lightweight aluminium and plastic. Available in two ringcolours and three power versions. Its distinctive features are low profile, light weight and very easy and fast installation.

APPLICATION

Designed for indoor use in common areas, passageways or to provide additional illumination in the office rooms. Due to equal surface illumination and high energy savings, it is especially recommended for public buildings.

NECTRA LITE 17W 1650LM IP44


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	502613
EAN:	5905963502613
Nominal power [W]:	17
Rated power of the luminaire [W]:	17
Luminous flux [lm]:	1650
Luminous efficacy [lm/W]:	97
Energy efficiency class:	E
Electrical protection class:	II
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Diffuser type:	OPAL
Material of the body:	PC
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	174/69
Mounting dimensions [mm]:	145x155

Ingress protection:	IP44/20
Working temperature [°C]:	from -20 to +40
Category type:	downlights
Category of application:	educational institutions, HoReCa, commercial facilities
Mounting version:	recessed
LED lifespan L70B50 [h]:	30000
LED lifespan L80B10 [h]:	20000
Photobiological safety:	RG0 - exempt (no photobiological hazard)
Warranty [years]:	5
CE certificate:	346/2023
Environmental Product Declaration (EPD):	944/2026
Manual:	Download PDF
ISO Certificates:	9001:2015. 14001:2015. 45001:2018. 50001:2018
Plik LDT:	Download

LIGHT CURVES

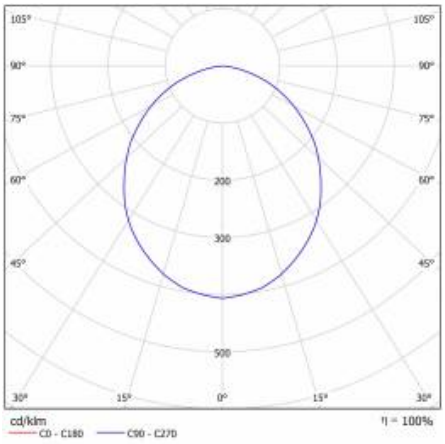

Card creation date: 29 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 346/2023

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl