

UP LED AS 2W 3000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	903014
Ingress protection:	IP65
Impact resistance:	IK08
Nominal power [W]:	2
Luminous flux [lm]*:	220
Colour temperature [K]:	3000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	plastic

CHARACTERISTICS

Energy-saving, outdoor 2W accent fitting provides economical and long-term operation without replacing light sources. Dustproof and waterproof luminaire with an ingress protection class of IP65, protected against dust and water splashing from a nozzle directed at any angle. Available with asymmetrical light distribution. Specification: color temperature of the LED light source: 3000K, 4000K.

APPLICATION

Outdoor luminaire intended to illuminate facades, stairs, alcoves, pillars and greenery in gardens, parks and recreational facilities.


UP LED AS 2W 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	2	Beam angle [°]:	60
Light source:	LED module	Diffuser material:	PC
Colour temperature [K]:	3000	Optics material:	PC
Luminous flux [lm]:	220	Material of the body:	plastic
Rated power of the luminaire [W]:	2	Mounting dimensions [mm]:	70/70/160
Diffuser type:	PRM	Mounting version:	into the ground
Supply voltage [V]:	220-240	Working temperature [°C]:	from -20 to +35
Ingress protection:	IP65	Net weight [kg]:	0.210
Frequency [Hz]:	50 - 60	CE certificate:	187/2023
Impact resistance:	IK08	Index:	903014
Dimensions (H/W/T/S) [mm]:	70/70/160	Warranty [years]:	2
Luminous efficacy [lm/W]:	110	EAN:	5905963903014
Energy efficiency class:	E	Category type:	accent lighting
Electrical protection class:	II	ETIM class:	EC000758
Colour rendering index:	>80	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
SDCM:	≤ 3	Manual:	Download PDF
LED lifespan L70B50 [h]:	50000	Pliik LDT:	Download

LIGHT CURVES

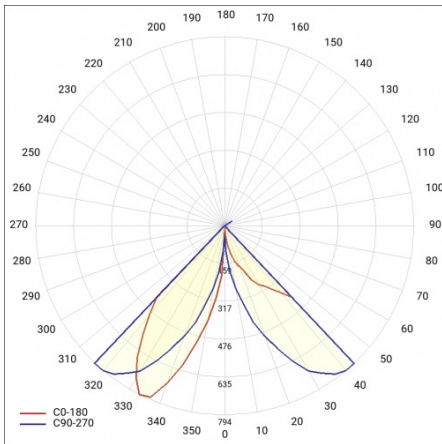

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 187/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl