

# UP LED AS 2W 4000K

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	903007
<b>Ingress protection:</b>	IP65
<b>Impact resistance:</b>	IK08
<b>Nominal power [W]:</b>	2
<b>Luminous flux [lm]*:</b>	240
<b>Colour temperature [K]:</b>	4000
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	D
<b>Material of the body:</b>	plastic

## CHARACTERISTICS

Energy-saving, outdoor 2W accent fitting provides economical and long-term operation without replacing light sources. Dustproof and waterproof luminaire with an ingress protection class of IP65, protected against dust and water splashing from a nozzle directed at any angle. Available with asymmetrical light distribution. Specification: color temperature of the LED light source: 3000K, 4000K.

## APPLICATION

Outdoor luminaire intended to illuminate facades, stairs, alcoves, pillars and greenery in gardens, parks and recreational facilities.


# UP LED AS 2W 4000K

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Material of the body:	plastic
Nominal power [W]:	2	Dimensions (H/W/T/S) [mm]:	70/70/160
Rated power of the luminaire [W]:	2	Mounting dimensions [mm]:	70/70/160
Supply voltage [V]:	220-240	Impact resistance:	IK08
Frequency [Hz]:	50 - 60	Ingress protection:	IP65
Luminous flux [lm]:	240	Mounting version:	into the ground
Luminous efficacy [lm/W]:	120	Working temperature [°C]:	from -20 to +35
Energy efficiency class:	D	Net weight [kg]:	0.210
Electrical protection class:	II	CE certificate:	<a href="#">187/2023</a>
Colour temperature [K]:	4000	Warranty [years]:	2
Colour rendering index:	>80	Index:	903007
SDCM:	≤ 3	EAN:	5905963903007
LED lifespan L70B50 [h]:	51000	Category type:	accent lighting
Beam angle [°]:	60	ETIM class:	EC000758
Diffuser material:	PC	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	PRM	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

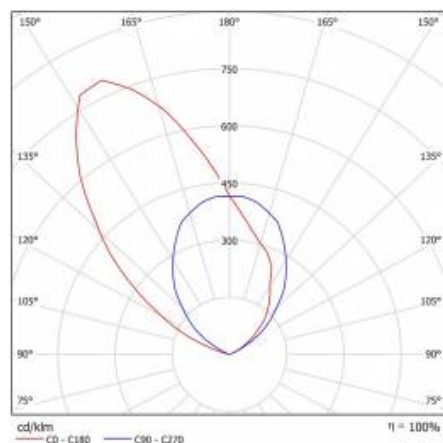

Card creation date: 20 May 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 187/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl