

CAPELLA LED EDGE BOX 1200LM 830 IP54 CORRIDOR WHITE (15W) 320MM

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP54
Nominal power [W]:	15
Luminous flux [lm]*:	1200
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	F
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	320/105

CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


CAPELLA LED EDGE BOX 1200LM 830 IP54 CORRIDOR WHITE (15W) 320MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Colour of the body:	white
Nominal power [W]:	15	Ring material:	ABS
Rated power of the luminaire [W]:	16	Dimensions (H/W/T/S) [mm]:	320/105
Supply voltage [V]:	220 - 240	Mounting dimensions [mm]:	160
Source luminous flux [lm]*:	1775	Impact resistance:	IK06
Luminous flux [lm]:	1200	Ingress protection:	IP54
Luminous efficacy [lm/W]:	73	Mounting version:	surface
Energy efficiency class:	F	Working temperature [°C]:	from -10 to +35
Electrical protection class:	II	Dimensions of single box [mm]:	342/342/122
Colour temperature [K]:	3000	Net weight [kg]:	0.840
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 3	CE certificate:	105/2018
Power factor:	0.50	Index:	660511
LED lifespan L70B50 [h]:	88000	Category type:	bulkheads
Beam angle [°]:	120	Version:	EDGE BOX
Diffuser material:	PC	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	OPAL	Surge protection [kV]:	5
Diffuser colour:	white	Corridor function:	yes
Material of the body:	ABS	Manual:	Download PDF

LIGHT CURVES

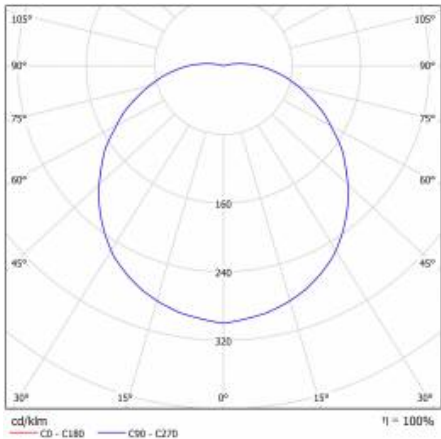

Card creation date:10 September 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 105/2018

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl