

CAPELLA LED EDGE BOX RING 1200LM 830 IP54 CORRIDOR WHITE (15W) 340MM

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP54
Nominal power [W]:	9
Luminous flux [lm]*:	750 - 1400
Colour temperature [K]:	3000; 4000
SDCM:	≤ 3; ≤ 4
Energy efficiency class:	A
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	natynkowy
Dimensions (H/W/T/S) [mm]:	320/105; 320/89; 340/105

CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


CAPELLA LED EDGE BOX RING 1200LM 830 IP54 CORRIDOR WHITE (15W) 340MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED GO!; LEDGO!	Dimensions (H/W/T/S) [mm]:	320/105; 320/89; 340/105
Nominal power [W]:	9	Mounting dimensions [mm]:	160
Rated power of the luminaire [W]:	11	Impact resistance:	IK06; IK07
Supply voltage [V]:	180; 220 - 240; 360	Ingress protection:	IP54
Frequency [Hz]:	50 - 60	Mounting version:	natynkowy
Source luminous flux [lm]*:	max 1951	Working temperature [°C]:	od -10 do +35
Luminous flux [lm]:	750 - 1400	Motion sensor:	yes
Energy efficiency class:	A	Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
Electrical protection class:	II	Dimensions of single box [mm]:	max 342/342/122
Colour temperature [K]:	3000; 4000	Warranty [years]:	do 5 lat (pod warunkiem rejestracji na stronie lenalighting.pl)
Colour rendering index:	>80	CE certificate:	105/2018
SDCM:	≤ 3; ≤ 4	Index:	x
Power factor:	0.50	EAN:	x
LED lifespan L70B50 [h]:	88000	Category type:	bulkheads
Beam angle [°]:	120	Version:	BOX; BOX RING; EDGE; EDGE BOX; EDGE BOX RING
Diffuser material:	PC	Max load (RCR) [W]:	300
Diffuser type:	OPAL	Product line:	standard
Diffuser colour:	biały	Photobiological safety:	grupa ryzyka 1 (niskie ryzyko)
Material of the body:	ABS	PIR:	yes
Colour of the body:	biały	Surge protection [kV]:	5
Ring material:	ABS	Corridor function:	yes
Ring colour:	biały	Manual:	Download PDF

LIGHT CURVES

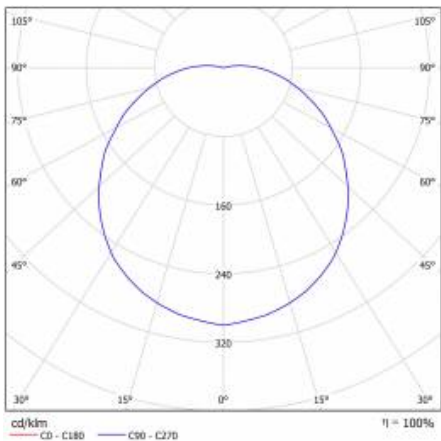

CAPELLA LED EDGE BOX RING 1200LM 830 IP54 CORRIDOR WHITE (15W) 340MM

DETAILED CARD
TECHNICAL DETAILS



CAPELLA LED EDGE

Card creation date: 10 September 2021
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 105/2018



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl