

VECTOR 3 LED VD 1441MM RCR 7700LM PRM MAT IP40 840 (77W)

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|-----------------------------------------|---------------------|
| Index: | 661082 |
| Ingress protection: | IP40 |
| Impact resistance: | IK07 |
| Nominal power [W]: | 77 |
| Luminous flux [lm]*: | 7700 |
| Colour temperature [K]: | 4000 |
| Color rendering index (Ra) >: | 80 |
| SDCM: | 3 |
| Energy efficiency class: | F |
| Material of the body: | powder coated steel |

CHARACTERISTICS

Surface-mounted luminaire made of powder-coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED modules with high luminous efficacy and SDCM <3. The luminaire in the standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

Available versions:
- motion sensor (RCR).

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings). The luminaire is intended for general areas inside buildings – store rooms and storage rack areas as well as cold stores included in tables 5.4 and 5.5 of the EN12464 standard; for indoor traffic zones included in table 5.1 of the EN12464 standard and for parking areas and as lighting of railway installations included in table 5.34 and 5.53 of the EN12464 standard, excluding ticket and luggage offices, counters, waiting rooms, entrance halls and lounges.


VECTOR 3 LED VD 1441MM RCR 7700LM PRM MAT IP40 840 (77W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------------|---------------------------|-----------------------------------------------------------------------------|
| Light source: | LED module | Impact resistance: | IK07 |
| Nominal power [W]: | 77 | Ingress protection: | IP40 |
| Rated power of the luminaire [W]: | 90 | Mounting version: | surface |
| Supply voltage [V]: | 220-240 | Working temperature [°C]: | from -20 to +35 |
| Frequency [Hz]: | 50 - 60 | Motion sensor: | yes |
| Luminous flux [lm]: | 7700 | Net weight [kg]: | 1.900 |
| Luminous efficacy [lm/W]: | 85 | Warranty [years]: | 5 |
| Energy efficiency class: | F | CE certificate: | 311/2023 |
| Electrical protection class: | I | Index: | 661082 |
| Colour temperature [K]: | 4000 | EAN: | 5905963661082 |
| Color rendering index (Ra) >: | 80 | Category type: | battens |
| SDCM: | 3 | AC voltage range [V]: | 207 - 253 |
| Power factor: | 0.99 | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Max load (RCR) [W]: | 400 | LED lifespan L70B50 [h]: | 135000 |
| Surge protection [kV]: | 2 | LED lifespan L80B10 [h]: | 85000 |
| Diffuser material: | PC | LED lifespan L90B10 [h]: | 40000 |
| Diffuser type: | PRM MAT | Warranty [years]: | 5 |
| Material of the body: | powder coated steel | Manual: | Download PDF |
| Colour of the body: | white | PZH certificate: | B-BK-60212-0019/20 |
| Dimensions (H/W/T/S) [mm]: | 1441/126/60 | Plik LDT: | Download |
| Mounting dimensions [mm]: | 1330 | | |

LIGHT CURVES

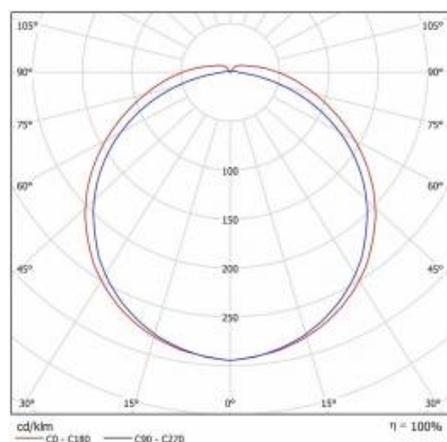

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric and electronic waste equipment regulations (WEEE).

Certificate CE - Nr: 311/2023

LENA
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl