VESPO LED 1441MM 7100LM PRM IP44 840 (48W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	639869
Ingress protection:	IP44
Impact resistance:	IK07
Nominal power [W]:	48
Luminous flux [lm]*:	7100
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	D
Material of the body:	powder coated steel

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.
Available versions:
- motion sensor (RCR),
- DALI,
- through-wiring (LS2),
- emergency module.

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).


VESPO LED 1441MM 7100LM PRM IP44 840 (48W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	**Ingress protection:**	IP44
Nominal power [W]:	48	**Mounting version:**	surface
Rated power of the luminaire [W]:	54.80	**Working temperature [°C]:**	from -20 to +35
Supply voltage [V]:	220-240	**Accessories included:**	Mounting pads (2 pcs.)
Frequency [Hz]:	50 - 60	**Net weight [kg]:**	2.800
Luminous flux [lm]:	7100	**Index:**	639869
Luminous efficacy [lm/W]:	130	**Category type:**	battens
Energy efficiency class:	D	**AC voltage range [V]:**	198 - 264
Electrical protection class:	I	**DC voltage range [V]:**	176 – 280
Colour temperature [K]:	4000	**LED lifespan L70B50 [h]:**	116000
Color rendering index (Ra) >:	80	**LED lifespan L80B10 [h]:**	72000
SDCM:	3	**LED lifespan L90B10 [h]:**	31000
Power factor:	0.97	**ETIM class:**	EC000109
Diffuser material:	PC	**Photobiological safety:**	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	PRM		
Material of the body:	powder coated steel	**Warranty [years]:**	5
Colour of the body:	white	**CE certificate:**	332/2023
Dimensions (H/W/T/S) [mm]:	1441/124/60	**PZH certificate:**	B-BK-60212-0278/20
Mounting dimensions [mm]:	1330	**Manual:**	Download PDF
Impact resistance:	IK07	**Plik LDT:**	Download

LIGHT CURVES

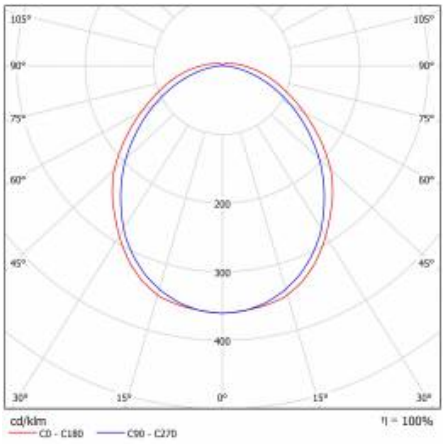

Card creation date: 05 October 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 332/2023

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl