


CAPELLA LED EDGE BOX RING VD 1950LM 840 IP54 RCR WHITE (21W) 340MM

DETAILED CARD

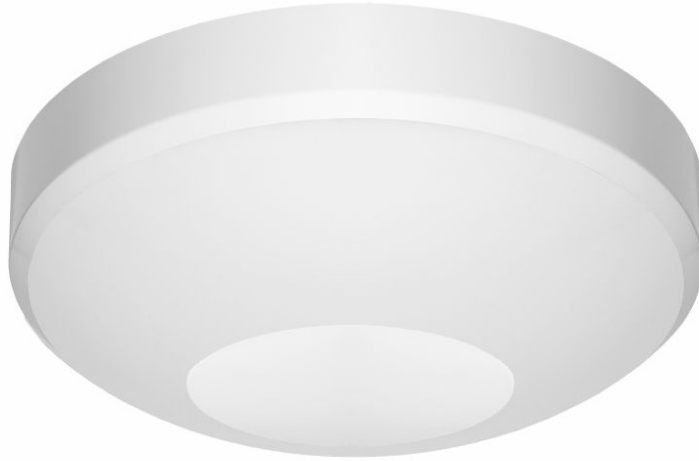

TECHNICAL PARAMETERS

Index:	953583
Ingress protection:	IP54
Impact resistance:	IK07
Nominal power [W]:	21
Luminous flux [lm]*:	1900
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	ABS
Ring material:	ABS

CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


CAPELLA LED EDGE BOX RING VD 1950LM 840 IP54 RCR WHITE (21W) 340MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Impact resistance:	IK07
Nominal power [W]:	21	Ingress protection:	IP54
Rated power of the luminaire [W]:	23	Mounting version:	surface
Supply voltage [V]:	220-240	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	1900	Motion sensor:	yes
Luminous efficacy [lm/W]:	78	Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
Energy efficiency class:	F	Dimensions of single box [mm]:	342/342/122
Electrical protection class:	II	Net weight [kg]:	0.820
Colour temperature [K]:	4000	Warranty [years]:	5
Colour rendering index:	>80	Flicker procent:	100
SDCM:	≤ 3	Index:	953583
Power factor:	0.98	Category type:	bulkheads
Beam angle [°]:	120	Category of application:	educational institutions
Surge protection [kV]:	2	Rated power rating 30min [W]:	24
Diffuser material:	PC	Luminous flux of the luminaire 0 min [lm]*:	1900
Diffuser type:	OPAL	AC voltage range [V]:	220 - 240
Material of the body:	ABS	ITHD [%]:	14
Colour of the body:	white	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Ring material:	ABS	EDGE/BOX Colour:	white
Ring colour:	white	Warranty [years]:	5
Dimensions (H/W/T/S) [mm]:	340/105	Manual:	Download PDF
Mounting dimensions [mm]:	160		

LIGHT CURVES

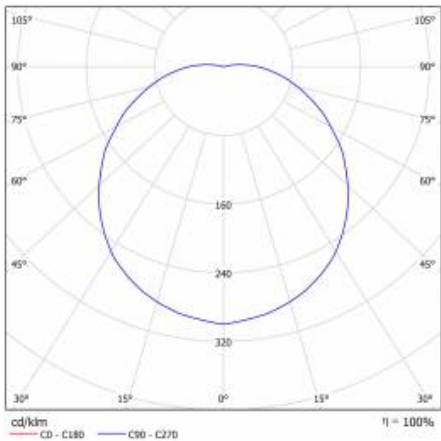

CAPELLA LED EDGE BOX RING VD 1950LM 840 IP54 RCR WHITE (21W) 340MM

DETAILED CARD
TECHNICAL DETAILS



CAPELLA LED EDGE

Card creation date: 17 September 2020
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 156/2020



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl