

CAPELLA LED VD 1500LM 840 IP54 WHITE (16W) 320MM

DETAILED CARD



TECHNICAL PARAMETERS

Index:	953286
Ingress protection:	IP54
Impact resistance:	IK06
Nominal power [W]:	16
Luminous flux [lm]*:	1500
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	ABS

CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


CAPELLA LED VD 1500LM 840 IP54 WHITE (16W) 320MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Impact resistance:	IK06
Nominal power [W]:	16	Ingress protection:	IP54
Rated power of the luminaire [W]:	18	Mounting version:	surface
Supply voltage [V]:	220-240	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	1500	Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
Luminous efficacy [lm/W]:	80	Dimensions of single box [mm]:	342/342/122
Energy efficiency class:	F	Net weight [kg]:	0.725
Electrical protection class:	II	Warranty [years]:	5
Colour temperature [K]:	4000	Flicker procent:	100
Colour rendering index:	>80	Index:	953286
SDCM:	≤ 3	Category type:	bulkheads
Power factor:	0.98	Category of application:	educational institutions
Beam angle [°]:	120	Rated power rating 30min [W]:	18
Surge protection [kV]:	2	Luminous flux of the luminaire 0 min [lm]*:	1500
Diffuser material:	PC	AC voltage range [V]:	220 - 240
Diffuser type:	OPAL	ITHD [%]:	14
Material of the body:	ABS	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour of the body:	white	Warranty [years]:	5
Dimensions (H/W/T/S) [mm]:	320/89	Manual:	Download PDF
Mounting dimensions [mm]:	160		

LIGHT CURVES

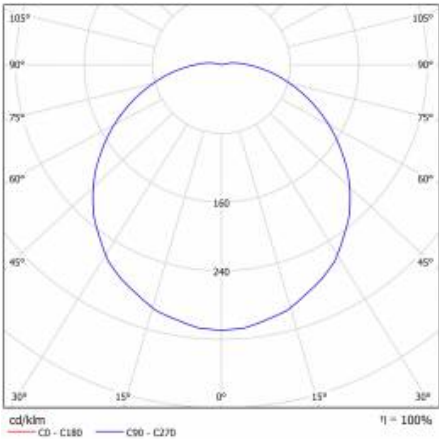

Card creation date: 17 September 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 156/2020



LENA
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl