

# COMPACT LED EVO P 4800LM PLX II CL. IP44/IP20 600X600 840 (42W) ZK

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	630095
<b>Ingress protection:</b>	IP44/20
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	42
<b>Luminous flux [lm]*:</b>	4800
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

Compact LED luminaire designed for installation in modular ceilings with concealed plank systems. Equipped with energy-saving LED panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

Luminaire compatible with the assembly system: ROCKFON® System T24 X™;

compatible modules: Blanca, Color-all, Sonar;

compatible module edge: X;

max. protrusion of the luminaire above modules level: about 2mm.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.

# COMPACT LED EVO P 4800LM PLX II CL. IP44/IP20


## 600X600 840 (42W) ZK

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

<b>Index:</b>	630095	<b>Material of the body:</b>	ABS
<b>EAN:</b>	5905963630095	<b>Colour of the body:</b>	white
<b>Light source:</b>	LED module	<b>Dimensions (H/W/T/S) [mm]:</b>	600/600/71
<b>Nominal power [W]:</b>	42	<b>Impact resistance:</b>	IK07
<b>Rated power of the luminaire [W]:</b>	43	<b>Ingress protection:</b>	IP44/20
<b>Supply voltage [V]:</b>	220-240	<b>Mounting version:</b>	recessed
<b>Frequency [Hz]:</b>	50 - 60	<b>Net weight [kg]:</b>	2.650
<b>Luminous flux [lm]:</b>	4800	<b>Category type:</b>	troffers
<b>Luminous efficacy [lm/W]:</b>	111	<b>LED lifespan L70B50 [h]:</b>	125000
<b>Energy efficiency class:</b>	E	<b>LED lifespan L80B10 [h]:</b>	82000
<b>Electrical protection class:</b>	II	<b>LED lifespan L90B10 [h]:</b>	40000
<b>Colour temperature [K]:</b>	4000	<b>ETIM class:</b>	EC002892
<b>Color rendering index (Ra) &gt;:</b>	80	<b>Photobiological safety:</b>	RG0 - exempt (no photobiological hazard)
<b>SDCM:</b>	3	<b>Warranty [years]:</b>	5
<b>Power factor:</b>	0.95	<b>CE certificate:</b>	<a href="#">455/2023</a>
<b>Beam angle [°]:</b>	120	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Diffuser material:</b>	PC	<b>ISO Certificates:</b>	9001:2015, 14001:2015, 45001:2018, 50001:2018
<b>Diffuser type:</b>	OPAL	<b>Pliik LDT:</b>	<a href="#">Download</a>

### LIGHT CURVES

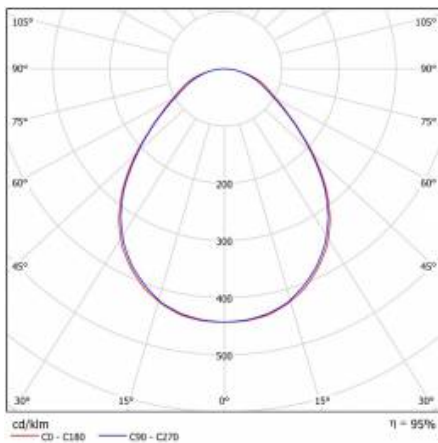

# COMPACT LED EVO P 4800LM PLX II CL. IP44/IP20

## 600X600 840 (42W) ZK

DETAILED CARD

### TECHNICAL DETAILS



COMPACT LED EVO P ZK SCHEMAT  
MONTAŻU



COMPACT LED EVO P ZK UCHWYT  
MONTAŻOWY



COMPACT LED EVO P ZK  
SZYBKOZŁĄCZE

Card creation date: 21 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 455/2023