

# COMPACT LED EVO P 5450LM PLX II CL. IP44/IP20 600X600 840 (52W) ZK

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	630699
<b>Ingress protection:</b>	IP44/20
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	52
<b>Luminous flux [lm]*:</b>	5450
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

Compact LED luminaire designed for installation in modular ceilings with concealed plank systems. Equipped with energy-saving LED panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

Luminaire compatible with the assembly system: ROCKFON® System T24 X™;

compatible modules: Blanca, Color-all, Sonar;

compatible module edge: X;

max. protrusion of the luminaire above modules level: about 2mm.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.

# COMPACT LED EVO P 5450LM PLX II CL. IP44/IP20


## 600X600 840 (52W) ZK

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	630699	Colour of the body:	white
EAN:	5905963630699	Dimensions (H/W/T/S) [mm]:	600/600/71
Light source:	LED module	Impact resistance:	IK07
Nominal power [W]:	52	Ingress protection:	IP44/20
Rated power of the luminaire [W]:	53	Mounting version:	recessed
Supply voltage [V]:	220-240	Net weight [kg]:	2.650
Frequency [Hz]:	50 - 60	Category type:	troffers
Luminous flux [lm]:	5450	LED lifespan L70B50 [h]:	115000
Luminous efficacy [lm/W]:	102	LED lifespan L80B10 [h]:	72000
Energy efficiency class:	E	LED lifespan L90B10 [h]:	35000
Electrical protection class:	II	ETIM class:	EC002892
Colour temperature [K]:	4000	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Color rendering index (Ra) >:	80	Warranty [years]:	5
SDCM:	3	CE certificate:	<a href="#">455/2023</a>
Power factor:	0.95	Environmental Product Declaration (EPD):	<a href="#">944/2026</a>
Beam angle [°]:	120	Manual:	<a href="#">Download PDF</a>
Diffuser material:	PC	ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Diffuser type:	OPAL	Pliik LDT:	<a href="#">Download</a>
Material of the body:	ABS		


### LIGHT CURVES

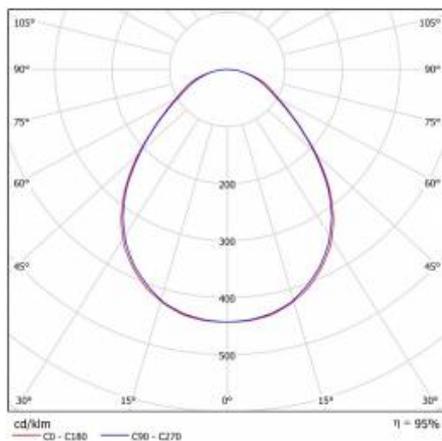

# COMPACT LED EVO P 5450LM PLX II CL. IP44/IP20 600X600 840 (52W) ZK

DETAILED CARD

## TECHNICAL DETAILS

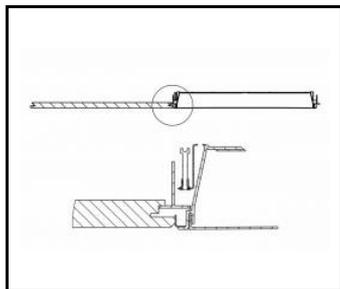

COMPACT LED EVO P ZK SCHEMAT  
MONTAŻU



COMPACT LED EVO P ZK UCHWYT  
MONTAŻOWY



COMPACT LED EVO P ZK  
SZYBKOZŁĄCZE

Card creation date: 28 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 455/2023