PORTAL LED BASIC HV 6W PC OPAL WHITE 4000K

DETAILED CARD

TECHNICAL PARAMETERS

Index:	199660/HV
Ingress protection:	IP54
Impact resistance:	IK08
Nominal power [W]:	6
Luminous flux [lm]*:	440
Colour temperature [K]:	4000
SDCM:	4
Energy efficiency class:	F
Material of the body:	PP
Diffuser material:	PC

CHARACTERISTICS

Surface mounted, rectangle LED light fixture with a high luminous flux, ingress protection class IP54 and an integrated energy-saving light source LED GO!. White ABS base; diffuser made of impact resistant PC provides even light distribution and ensures a high impact resistance class (IK08).

APPLICATION

Surface mounted luminaire for mounting on ceilings and walls; intended for indoor use (rooms with high humidity, passageways, staircases) as well as outdoor use (façade lighting). The version with a radio motion sensor (RCR) is particularly well-suited to be used as a light source for public rooms and buildings (civic buildings, apartment buildings).
The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.

PORTAL LED BASIC HV 6W PC OPAL WHITE 4000K


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	199660/HV
EAN:	5905963199660
Light source:	LED module
Nominal power [W]:	6
Rated power of the luminaire [W]:	6
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Luminous flux [lm]:	440
Luminous efficacy [lm/W]:	73
Energy efficiency class:	F
Electrical protection class:	I
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	4
Power factor:	0.53
LED lifespan L70B50 [h]:	50000
Beam angle [°]:	120
Diffuser material:	PC
Diffuser type:	OPAL

Material of the body:	PP
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	280/185/55
Impact resistance:	IK08
Ingress protection:	IP54
Mounting version:	surface
Working temperature [°C]:	from -25 to +35
Net weight [kg]:	0.520
Category type:	bulkheads
Luminaire rated power 0min [W]:	6
ETIM class:	EC002892
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Warranty [years]:	5
CE certificate:	404/2023
Environmental Product Declaration (EPD):	944/2026
Manual:	Download PDF
ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Plik LDT:	Download

LIGHT CURVES

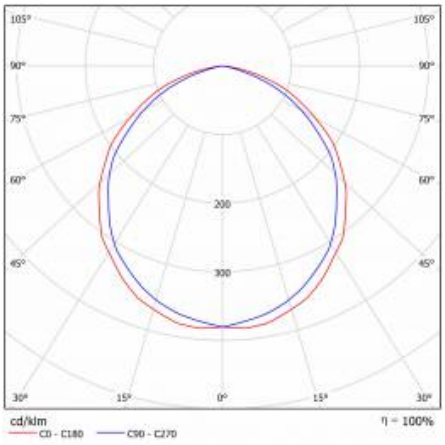

Card creation date: 30 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 404/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl