# DIONE LED PLUS ASYMMETRIC P 3200LM 840 IP65 I KL. DALI RCR OPAL WHITE 32W CORRIDOR

DETAILED CARD



## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 952340 |
| **Nominal power [W]:** | 32 |
| **Luminous flux [lm]*:** | 3200 |
| **Colour temperature [K]:** | 4000 |
| **SDCM:** | 3 |
| **Energy efficiency class:** | E |
| **Material of the body:** | ABS |
| **Ring material:** | ABS |
| **Diffuser material:** | PC |
| **Diffuser type:** | OPAL |

## CHARACTERISTICS

Designed from scratch surface mounted, round LED luminaire with integrated, energy saving LED panel and asymmetrical light distribution. The fitting introduces new solutions to improve the light distribution and balance of the temperatures. It is characterized by high lighting efficiency and very high IP65 ingress protection. Specially profiled diffuser made of vandal-resistant PC allows to keep the highest degree of impact resistance IK10. **P** – painted diffuser and ring. It uses a number of proven solutions affecting the speed and ease of the assembly (suspension kit for the diffuser, readiness for through wiring) and component security: diffuser integrated with LED panel. The ceiling ring is used to cover the gap between the luminaire and the surface on which it is mounted. The accessory can be used in prison cells. Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

## APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes) or outdoor. It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.

# DIONE LED PLUS ASYMMETRIC P 3200LM 840 IP65 I KL. DALI RCR OPAL WHITE 32W CORRIDOR

DETAILED CARD

## TECHNICAL PARAMETERS TABLE


| | |
|---|---|
| **Index:** | 952340 |
| **Light source:** | LED module |
| **Nominal power [W]:** | 32 |
| **Rated power of the luminaire [W]:** | 33 |
| **Supply voltage [V]:** | 220-240 |
| **Frequency [Hz]:** | 50 - 60 |
| **Luminous flux [lm]:** | 3200 |
| **Luminous efficacy [lm/W]:** | 97 |
| **Energy efficiency class:** | E |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 80 |
| **SDCM:** | 3 |
| **Power factor:** | 0.94 |
| **Beam angle [°]:** | 120 |
| **Surge protection [kV]:** | 1 |
| **Diffuser material:** | PC |
| **Diffuser type:** | OPAL |
| **Diffuser colour:** | white |
| **Optics material:** | ABS |
| **Material of the body:** | ABS |
| **Colour of the body:** | white |
| **Ring material:** | ABS |
| **Ring colour:** | white |
| **Dimensions (H/W/T/S) [mm]:** | 340/115 |
| **Mounting dimensions [mm]:** | 140 |
| **Impact resistance:** | IK10 |

| | |
|---|---|
| **Ingress protection:** | IP65 |
| **Mounting version:** | surface |
| **Working temperature [°C]:** | from -20 to +35 |
| **Corridor function:** | yes |
| **Motion sensor:** | yes |
| **DIMM DALI:** | yes |
| **Dimensions of single box [mm]:** | 340/340/115 |
| **Net weight [kg]:** | 1 |
| **Warranty [years]:** | 5 |
| **Permeability factor of the diffuser:** | 0.80 |
| **Category type:** | bulkheads |
| **Category of application:** | educational institutions, commercial facilities |
| **Version:** | P |
| **AC voltage range [V]:** | 198 - 264 |
| **DC voltage range [V]:** | 176 - 280 |
| **LED lifespan L70B50 [h]:** | 115000 |
| **LED lifespan L80B10 [h]:** | 75000 |
| **LED lifespan L90B10 [h]:** | 33000 |
| **Light distribution type:** | asymmetric |
| **Photobiological safety:** | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| **CE certificate:** | 380/2023 |
| **Warranty [years]:** | 5 |
| **ENEC Certificate:** | PL BBJ/011/2021/M1/A1 |
| **Environmental Product Declaration (EPD):** | 944/2026 |
| **Manual:** | Download PDF |
| **ISO Certificates:** | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |
| **Plik LDT:** | Download |

# DIONE LED PLUS ASYMMETRIC P 3200LM 840 IP65 I KL. DALI RCR OPAL WHITE 32W CORRIDOR

DETAILED CARD

**LIGHT CURVES**

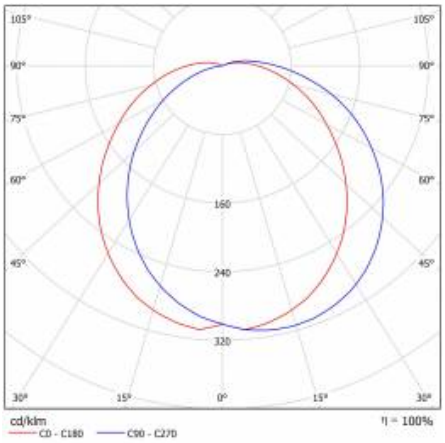


# DIONE LED PLUS ASYMMETRIC P 3200LM 840 IP65 I KL. DALI RCR OPAL WHITE 32W CORRIDOR

DETAILED CARD

## ACCESSORIES AVAILABLE

| index | Name |
|---|---|
| 120DL118 | Ceiling ring Dione LED steel 1.5 white matt RAL 9003 painted vandal resistant |



Ceiling ring Dione LED steel 1.5 white matt RAL 9003 painted vandal resistant (120DL118)



The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 380/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl