

# CAPELLA LED PLUS EDGE BOX 2300LM 830 IP54 RCR WHITE (26W) 320MM

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	953873
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK06
<b>Nominal power [W]:</b>	26
<b>Luminous flux [lm]*:</b>	2300
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 4
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	ABS
<b>Ring material:</b>	ABS

## CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

This ceiling fixture is also available in the following variants:

- with a radio motion sensor,
- with a PIR presence detector,
- with DALI control,
- with CORRIDOR function (DALI + RCR),
- with Master / Slave RCR motion sensor (wireless),
- with emergency module,
- with very high ingress protection IP65,
- with ANTIVANDAL protection.

## APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


# CAPELLA LED PLUS EDGE BOX 2300LM 830 IP54 RCR WHITE (26W) 320MM

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Dimensions (H/W/T/S) [mm]:	320/105
Nominal power [W]:	26	Mounting dimensions [mm]:	158
Rated power of the luminaire [W]:	28	Impact resistance:	IK06
Supply voltage [V]:	220-240	Ingress protection:	IP54
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	2300	Working temperature [°C]:	from -10 to +35
Luminous efficacy [lm/W]:	83	Motion sensor:	yes
Energy efficiency class:	F	Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
Electrical protection class:	II	Dimensions of single box [mm]:	342/342/122
Colour temperature [K]:	3000	Net weight [kg]:	0.920
Colour rendering index:	80	Warranty [years]:	5
SDCM:	≤ 4	CE certificate:	<a href="#">374/2023</a>
Power factor:	0.93	Index:	953873
LED lifespan L70B50 [h]:	120000	Category type:	bulkheads
Beam angle [°]:	120	Version:	EDGE BOX
Surge protection [kV]:	2	AC voltage range [V]:	198 - 264
Diffuser material:	PC	UGR (4H8H):	17.5
Diffuser type:	OPAL	Dimensions of bulk box (H/W/D) [mm]:	794/1194/982
Diffuser colour:	white	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Material of the body:	ABS	EDGE/BOX Colour:	white
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>
Ring material:	ABS	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

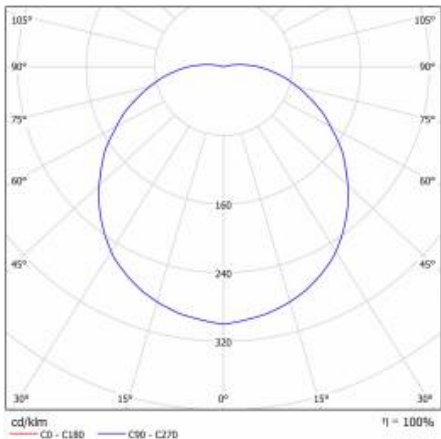

Card creation date: 17 February 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 374/2023

 **LENA**  
LIGHTING

Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)