

TEO LED LV 306MM 1450LM 830 SREBRNY (15W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	191930
Ingress protection:	IP65
Impact resistance:	IK10
Nominal power [W]:	15
Luminous flux [lm]*:	1450
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	aluminium
Diffuser type:	OPAL

CHARACTERISTICS

Surface mounted, round LED fitting with increased ingress protection class IP65 and integrated energy-saving light source LED GO!. Body and base made of high-pressure cast aluminum and powder coated silver or graphite. Specially formed diffuser made of impact resistant PC ensures the highest possible impact resistance of the fitting (IK10). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

Surface mounted luminaire intended for indoor or outdoor use. Suitable as a general light source in representative rooms and passageways. Very good mechanical parameters (increased ingress protection class IP65 and impact resistance IK10) allow this fitting to be used for facade applications.


TEO LED LV 306MM 1450LM 830 SREBRNY (15W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Dimensions (H/W/T/S) [mm]:	ø306/90
Nominal power [W]:	15	Impact resistance:	IK10
Rated power of the luminaire [W]:	17.10	Ingress protection:	IP65
Supply voltage [V]:	220-240	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	1450	Net weight [kg]:	1.700
Luminous efficacy [lm/W]:	84	Warranty [years]:	5
Energy efficiency class:	F	CE certificate:	128/2017
Electrical protection class:	I	Index:	191930
Colour temperature [K]:	3000	EAN:	5905963191930
Colour rendering index:	>80	Category type:	bulkheads
SDCM:	≤ 3	Luminaire rated power Φ_{min} [W]:	18
Diffuser type:	OPAL	ETIM class:	EC002892
Material of the body:	aluminium	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour of the body:	silver	Manual:	Download PDF

LIGHT CURVES

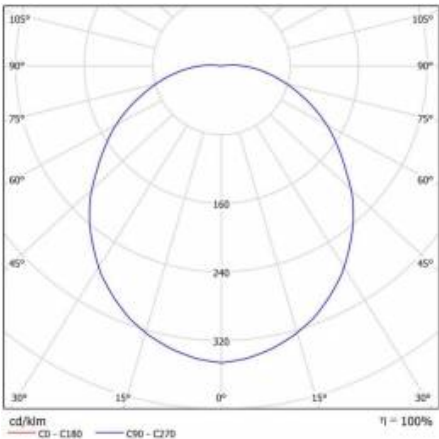

Card creation date: 23 March 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 128/2017

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl