TEO LED LV 306MM 1550LM 840 GRAFIT (15W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	191961
Ingress protection:	IP65
Impact resistance:	IK10
Nominal power [W]:	15
Luminous flux [lm]*:	1550
Colour temperature [K]:	4000
SDCM:	3
Energy efficiency class:	F
Material of the body:	aluminium
Diffuser type:	OPAL

CHARACTERISTICS

Surface mounted, round LED fitting with increased ingress protection class IP65 and integrated energy-saving light source LED GO!. Body and base made of high-pressure cast aluminum and powder coated silver or graphite. Specially formed diffuser made of impact resistant PC ensures the highest possible impact resistance of the fitting (IK10). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

Surface mounted luminaire intended for indoor or outdoor use. Suitable as a general light source in representative rooms and passageways. Very good mechanical parameters (increased ingress protection class IP65 and impact resistance IK10) allow this fitting to be used for facade applications.


TEO LED LV 306MM 1550LM 840 GRAFIT (15W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	**Impact resistance:**	IK10
Nominal power [W]:	15	**Ingress protection:**	IP65
Rated power of the luminaire [W]:	17.10	**Mounting version:**	surface
Supply voltage [V]:	220-240	**Working temperature [°C]:**	from -20 to +35
Frequency [Hz]:	50 - 60	**Net weight [kg]:**	1.700
Luminous flux [lm]:	1550	**Warranty [years]:**	5
Luminous efficacy [lm/W]:	91	**CE certificate:**	405/2023
Energy efficiency class:	F	**Index:**	191961
Electrical protection class:	I	**EAN:**	5905963191961
Colour temperature [K]:	4000	**Category type:**	bulkheads
Color rendering index (Ra) >:	80	**Luminaire rated power 0min [W]:**	18
SDCM:	3	**ETIM class:**	EC002892
Diffuser type:	OPAL	**Photobiological safety:**	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Material of the body:	aluminium	**Manual:**	Download PDF
Colour of the body:	graphite	**Plik LDT:**	Download
Dimensions (H/W/T/S) [mm]:	ø306/90		

LIGHT CURVES

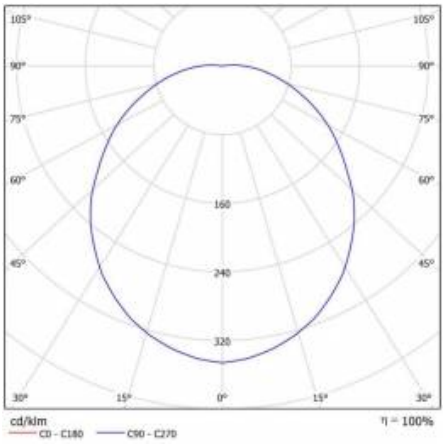

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 405/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl