

TEO LED LV 306MM 1550LM 840 GRAFIT (15W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	191961
Ingress protection:	IP65
Impact resistance:	IK10
Nominal power [W]:	15
Luminous flux [lm]*:	1550
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	aluminium
Diffuser type:	OPAL

CHARACTERISTICS

Surface mounted, round LED fitting with increased ingress protection class IP65 and integrated energy-saving light source LED GO!. Body and base made of high-pressure cast aluminum and powder coated silver or graphite. Specially formed diffuser made of impact resistant PC ensures the highest possible impact resistance of the fitting (IK10). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

Surface mounted luminaire intended for indoor or outdoor use. Suitable as a general light source in representative rooms and passageways. Very good mechanical parameters (increased ingress protection class IP65 and impact resistance IK10) allow this fitting to be used for facade applications.


TEO LED LV 306MM 1550LM 840 GRAFIT (15W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	15	Impact resistance:	IK10
Light source:	LED module	Ingress protection:	IP65
Colour temperature [K]:	4000	Mounting version:	surface
Luminous flux [lm]:	1550	Working temperature [°C]:	from -20 to +35
Rated power of the luminaire [W]:	17.10	Net weight [kg]:	1.700
Diffuser type:	OPAL	Warranty [years]:	5
Supply voltage [V]:	220-240	CE certificate:	405/2023
Colour of the body:	graphite	Index:	191961
Frequency [Hz]:	50 - 60	EAN:	5905963191961
Energy efficiency class:	F	Category type:	bulkheads
Luminous efficacy [lm/W]:	91	Luminaire rated power P_{min} [W]:	18
Electrical protection class:	I	ETIM class:	EC002892
Colour rendering index:	>80	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
SDCM:	≤ 3	Manual:	Download PDF
Material of the body:	aluminium	Plik LDT:	Download
Dimensions (H/W/T/S) [mm]:	ø306/90		

LIGHT CURVES

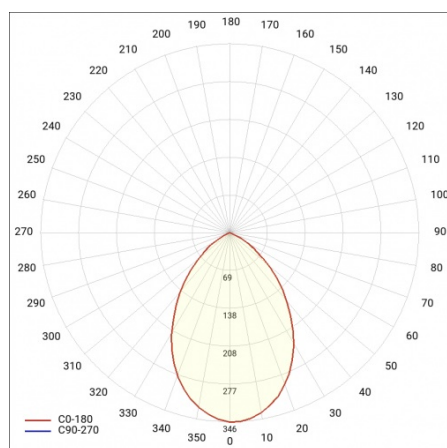

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 405/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl