


# SQ 300 LED VD 1500LM 840 IP54 II KL. RCR OPAL (13W) 300MM (H)

DETAILED CARD

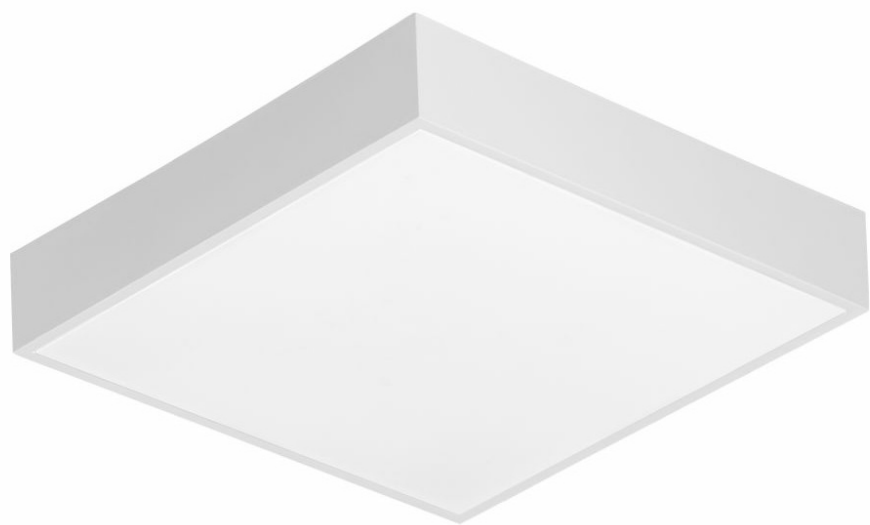

## TECHNICAL PARAMETERS

Index:	664014/H
Ingress protection:	IP54
Impact resistance:	IK08
Nominal power [W]:	13
Luminous flux [lm]*:	1500
Colour temperature [K]:	4000
SDCM:	≤ 5
Energy efficiency class:	F
Material of the body:	ABS
Diffuser material:	PS

## CHARACTERISTICS

SQ 300 LED is a new line of square ceiling lamps. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, thanks to which it is characterized by low weight and high impact resistance (IK08). The diffuser made of PC polycarbonate provides the lamp with excellent lighting properties. Integrated LED module It provides low power consumption and all the advantages of modern lamps with an LED source.

## APPLICATION

The surface-mounted luminaire for ceiling or wall mounting is intended for indoor use: utility rooms, staircases, passageways. It is recommended for use in public areas.

The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.


# SQ 300 LED VD 1500LM 840 IP54 II KL. RCR OPAL (13W) 300MM (H)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	664014/H	Impact resistance:	IK08
Light source:	LED module	Ingress protection:	IP54
Nominal power [W]:	13	Mounting version:	surface
Rated power of the luminaire [W]:	17.40	Motion sensor:	yes
Supply voltage [V]:	220-240	Dimensions of single box [mm]:	305/305/60
Frequency [Hz]:	50 - 60	Net weight [kg]:	0.685
Luminous flux [lm]:	1500	Category type:	bulkheads
Luminous efficacy [lm/W]:	82	Category of application:	HoReCa, commercial facilities, educational institutions
Energy efficiency class:	F	AC voltage range [V]:	220 - 240
Electrical protection class:	II	LED lifespan L70B50 [h]:	120000
Colour temperature [K]:	4000	LED lifespan L80B20 [h]:	85000
Colour rendering index:	>80	LED lifespan L90B10 [h]:	45000
SDCM:	≤ 5	Light distribution type:	open space
Power factor:	0.90	Warranty [years]:	5
Beam angle [°]:	120	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Surge protection [kV]:	1	Working temperature [°C]:	from -20 to +35
Diffuser material:	PS	Permeability factor of the diffuser:	0.70
Diffuser type:	OPAL	Warranty [years]:	2
Diffuser colour:	white	CE certificate:	<a href="#">57/2020</a>
Material of the body:	ABS	PZH certificate:	
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>
Dimensions (H/W/T/S) [mm]:	300/300/58	ENEC Certificate:	<a href="#">0316/ENEC/23</a>
Mounting dimensions [mm]:	210		

## LIGHT CURVES

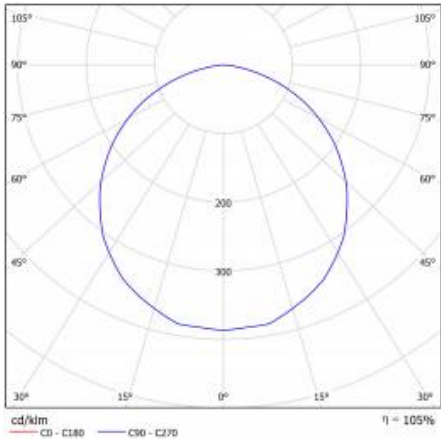

Card creation date: 02 June 2023  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 57/2020



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)