

# COMPACT LED EVO P 6550LM PRM II KL IP65/IP20 595X595 840 (52W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP65/20
<b>Nominal power [W]:</b>	52
<b>Luminous flux [lm]*:</b>	6550
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	D
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	PRM
<b>Mounting version:</b>	recessed

## CHARACTERISTICS

Compact LED luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.

[COMPACT LED product site](#)

# COMPACT LED EVO P 6550LM PRM II KL IP65/IP20


## 595X595 840 (52W)

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	631214	Dimensions (H/W/T/S) [mm]:	71/595/595/0
Light source:	LED module	Ingress protection:	IP65/20
Nominal power [W]:	52	Mounting version:	recessed
Rated power of the luminaire [W]:	53	Working temperature [°C]:	from -20 to +25
Supply voltage [V]:	220-240	Net weight [kg]:	2.280
Frequency [Hz]:	50 - 60	Warranty [years]:	5
Luminous flux [lm]:	6550	CE certificate:	<a href="#">62/2020</a>
Luminous efficacy [lm/W]:	123	PZH certificate:	<a href="#">B-BK-60212-0070/20 B-BK-60212-0042/20 B-BK-60212-0620/20</a>
Energy efficiency class:	D	EAN:	5905963631214
Electrical protection class:	II	Category type:	louvres
Colour temperature [K]:	4000	AC voltage range [V]:	198 - 264
Colour rendering index:	>80	DC voltage range [V]:	176 – 280
SDCM:	≤ 3	UGR (4H8H):	18,3-22,2
Power factor:	0.90	LED lifespan L70B50 [h]:	115000
Diffuser material:	PC	LED lifespan L80B20 [h]:	72000
Diffuser type:	PRM	LED lifespan L90B10 [h]:	35000
Diffuser colour:	transparent	Impact resistance:	IK07
Material of the body:	ABS	Luminaire rated power $O_{min}$ [W]:	53
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>

### LIGHT CURVES

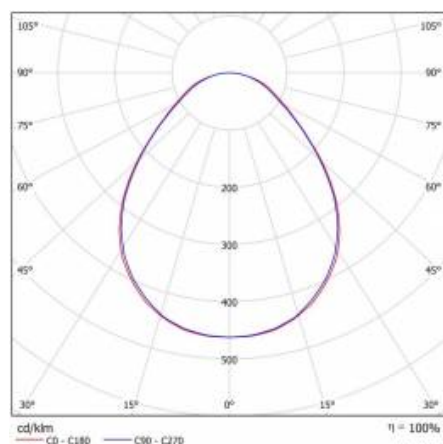

# COMPACT LED EVO P 6550LM PRM II KL IP65/IP20 595X595 840 (52W)

---

DETAILED CARD

## TECHNICAL DETAILS

---



COMPACT LED EVO PRM

# COMPACT LED EVO P 6550LM PRM II KL IP65/IP20

## 595X595 840 (52W)

DETAILED CARD

### ACCESSORIES AVAILABLE

index	Name
630033	Plasterboard mounting brackets (4 pcs)
904349	Safety suspension (modular ceiling)
999543	Plasterboard recessing kit 630x630 white (steel version)
374845	Frame adapter KG 635x635 WHITE
998966	Frame steel white structure RAL9016 600x600 SM "well effect"



Plasterboard mounting brackets (4 pcs) (630033)



Safety suspension (modular ceiling) (904349)



Plasterboard recessing kit 630x630 white (steel version) (999543)



Frame steel white structure RAL9016 600x600 SM "well effect" (998966)

Card creation date: 19 June 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 62/2020