

# SQ 600 LED 3700LM PRM I KL. IP20 592X592MM 840 (24W)

DETAILED CARD



## TECHNICAL PARAMETERS

|                                 |           |
|---------------------------------|-----------|
| <b>Index:</b>                   | 668876    |
| <b>Ingress protection:</b>      | IP44/IP20 |
| <b>Nominal power [W]:</b>       | 24        |
| <b>Luminous flux [lm]*:</b>     | 3700      |
| <b>Colour rendering index:</b>  | >80       |
| <b>SDCM:</b>                    | ≤ 3       |
| <b>Energy efficiency class:</b> | C         |
| <b>Material of the body:</b>    | ABS       |
| <b>Diffuser material:</b>       | PS        |
| <b>Diffuser type:</b>           | PRM       |

## CHARACTERISTICS

SQ 600 LED is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

The luminaire is available in 2 versions:

- with OPAL diffuser - providing soft light;
- with PRM diffuser - with higher luminous efficiency and low glare UGR <19 (18W, 24W, 32W versions).

Available options:

- RCR sensor - sensor used for motion detection, without twilight detection option; uses microwaves for detection (active sensor),
- control in the DALI standard,
- CORRIDOR corridor function (RCR + DALI).

The ingress protection- depends on the method of installation:

- surface mounted - IP20,
- flush-mounted - IP44/20.

## APPLICATION

Surface-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


# SQ 600 LED 3700LM PRM I KL. IP20 592X592MM 840 (24W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |             |                            |   |
|-----------------------------------|-------------|----------------------------|---|
| Nominal power [W]:                | 24          | Material of the body:      | ABS   |
| Index:                            | 668876      | Dimensions (H/W/T/S) [mm]: | 592/592/44  |
| Colour temperature [K]:           | 4000        | Mounting dimensions [mm]:  | 563/297   |
| Light source:                     | LED module  | Ingress protection:        | IP44/IP20   |
| Luminous flux [lm]:               | 3700        | Glow wire test [°C]:       | 650   |
| Diffuser type:                    | PRM         | Mounting version:          | surface mounted; recessed mounted in modular ceiling possible |
| Rated power of the luminaire [W]: | 25          | Net weight [kg]:           | 1.730   |
| UGR (4H8H):                       | <19         | Category type:             | louvres   |
| Supply voltage [V]:               | 220-240     | Category of application:   | commercial facilities, educational institutions               |
| Frequency [Hz]:                   | 50 - 60     | LED lifespan L70B50 [h]:   | 132000  |
| Colour of the body:               | white       | LED lifespan L80B20 [h]:   | 84000   |
| Luminous efficacy [lm/W]:         | 148         | LED lifespan L90B10 [h]:   | 42000   |
| Energy efficiency class:          | C           | Light distribution type:   | open space  |
| Electrical protection class:      | I           | Photobiological safety:    | RG0 - exempt (no photobiological hazard)                      |
| Colour rendering index:           | >80         | Technical Warranty:        | 5   |
| SDCM:                             | ≤ 3         | PZH certificate:           | <a href="#">B-BK-60212-0618/20</a>                            |
| Power factor:                     | 0.95        | CE certificate:            | <a href="#">110/2023</a>                                      |
| Diffuser material:                | PS          | Manual:                    | <a href="#">Download PDF</a>                                  |
| Diffuser colour:                  | transparent | ENEC Certificate:          | <a href="#">PL BBJ/006/2021/M1</a>                            |
|                                   |             | ETIM class:                | EC002892  |
|                                   |             | Pliik LDT:                 | <a href="#">Download</a>                                      |

## LIGHT CURVES

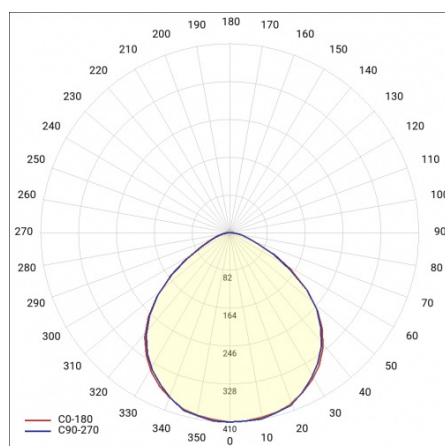

# SQ 600 LED 3700LM PRM I KL. IP20 592X592MM 840 (24W)

DETAILED CARD

## ACCESSORIES AVAILABLE

| index  | Name   |
|--------|--|
| 999543 | Plasterboard recessing kit 630x630 white (steel version)     |
| 978395 | Installation kit SQ 600 Ceiling system H40 100x100           |
| 374845 | Frame adapter KG 635x635 WHITE                               |
| 998966 | Frame steel white structure RAL9016 600x600 SM "well effect" |



Plasterboard recessing kit 630x630 white (steel version) (999543)



Frame steel white structure RAL9016 600x600 SM "well effect" (998966)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 110/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl