

ASTRA LED 9100LM 840 AR1 IP65 II CL. RCR WIRE 0,7M WTYK/GN SP10KV (69W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	663338
Ingress protection:	IP65
Impact resistance:	IK08
Rated power of the luminaire [W]*:	69
Luminous flux [lm]*:	9100
Colour temperature [K]:	4000
SDCM:	5
Color rendering index (Ra) >:	80
Electrical protection class:	II
Energy efficiency class:	D

CHARACTERISTICS

Streetlight LED fitting with high luminous flux (max 153 lm/W) and an integrated energy-saving LED module. The self-cleaning body made of polypropylene (PP) with fibreglass (GF) and the grip made of aluminium. Thanks to the directional lens (made of PC), the light distribution meets the requirements of PN-EN 13201 lighting class. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting by 5 degrees in the range of: -5° to +15° (peak to pole); -15° to +5° (side to boom). Options: any RAL color. RCR sensor controlled by remote control.

APPLICATION

Luminaire applicable to: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: lateral side entry, post-top mounting. Mounting grip integrated with the fitting.


ASTRA LED 9100LM 840 AR1 IP65 II CL. RCR WIRE 0,7M WTYK/GN SP10KV (69W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	663338	Lateral surface (SCx) [m2]:	0.020
EAN:	6633385905963	Wire type:	H07RN-F
Light source:	LED module	Cable length [m]:	0.70
Rated power of the luminaire [W]:	69	Number on the palette [pcs]:	62
Supply voltage [V]:	220 - 240	Net weight [kg]:	1.900
Frequency [Hz]:	50 - 60	Category type:	street lighting
Luminous flux [lm]:	9100	LED lifespan L80B10 [h]:	75000
Luminous efficacy [lm/W]:	132	Light distribution type:	symetryczny/uliczny
Energy efficiency class:	D	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Electrical protection class:	II	Surge protection [kV]:	10
Colour temperature [K]:	4000	Motion sensor:	yes
Color rendering index (Ra) >:	80	Through wiring:	H07RN-F
SDCM:	5	Operating mode:	1
Power factor:	0.98	ULOR:	0%
Diffuser material:	PC	Optics:	AR1
Diffuser type:	matrix led	Control:	ON/OFF
Diffuser colour:	transparent	Optics material:	PC
Material of the body:	PP+FG	Dusk sensor:	yes
Colour of the body:	gray	Warranty [years]:	5
Dimensions (H/W/T/S) [mm]:	640/233/113	CE certificate:	102/2023
Mounting dimensions [mm]:	ø60	ENEC Certificate:	0324/ENEC/23
Impact resistance:	IK08	Manual:	Download PDF
Ingress protection:	IP65	Category of application:	Street lighting
Mounting version:	Top, on pole / Side, on boom	ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Working temperature [°C]:	from -20 to +35	Plik LDT:	Download
Tilt angle adjustment [°]:	-5 to +15 (peak); -15 to +5 (side)		

LIGHT CURVES

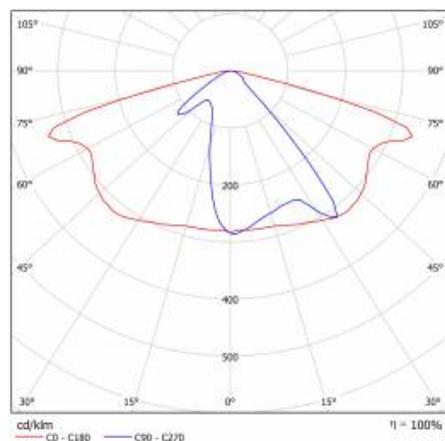

ASTRA LED 9100LM 840 AR1 IP65 II CL. RCR WIRE 0,7M WTYK/GN SP10KV (69W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
314049	wall holder (galvanized)
314056	wall holder (grey)
598357	Pole adapter 80/60 ALU
UL00214	Adjustable bracket Astra LED/Astra LED BASIC aluminium grey RAL 9006 diameter 64 mm Corona 2 LED
WSEL431	HAI HD05R RC Programming Remote Control for HD0406VRH IoT



wall holder (galvanized) (314049)



wall holder (grey) (314056)



Pole adapter 80/60 ALU (598357)



Adjustable bracket Astra LED/Astra LED BASIC aluminium grey RAL 9006 diameter 64 mm Corona 2 LED (UL00214)



HAI HD05R RC Programming Remote Control for HD0406VRH IoT (WSEL431)

Card creation date: 24 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 102/2023