


# INDUSTRY IP66 LED MR 1450MM 51000LM 840 (318W)

## DETAILED CARD

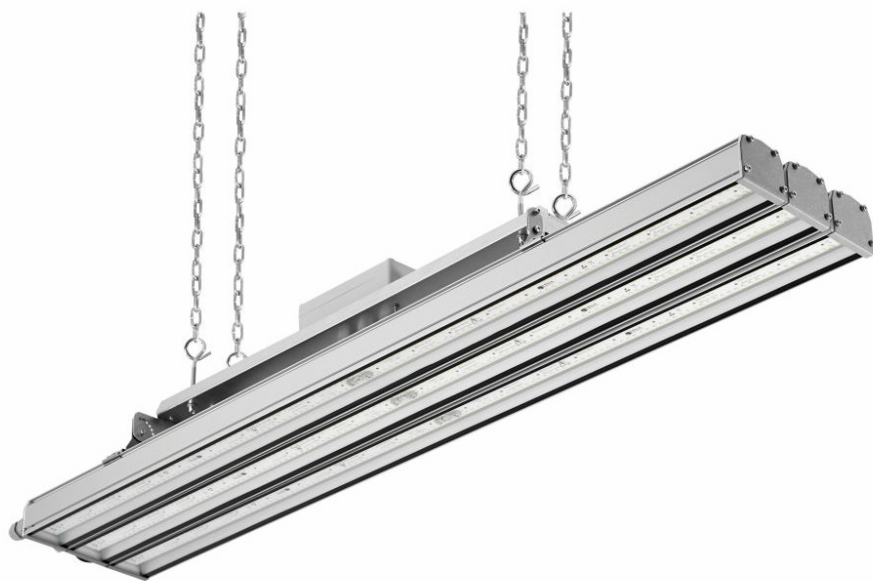

### TECHNICAL PARAMETERS

Index:	552625
Ingress protection:	IP66
Impact resistance:	IK08
Nominal power [W]:	318
Luminous flux [lm]*:	51000
Colour temperature [K]:	4000
Energy efficiency class:	C
Material of the body:	aluminium
Colour of the body:	grey
Diffuser material:	glass

### CHARACTERISTICS

INDUSTRY IP66 LED MR is a lamp from the NEXT GEN line, which is a new generation of lamps dedicated to LED technology. The body, made from scratch, made of aluminum profile and subjected to anodization process, provides the lamp with strength and solidity, as well as steel sheet ensuring installation stability. LEDs from a reputable manufacturer and new LED modules have an impact on very high luminous efficacy: up to 148 lm / W. This guarantees that the required lighting level is achieved and that significant energy savings are achieved. The shade is made of UV resistant tempered glass. The combination of materials (aluminum and toughened glass) and a non-dismantled construction with an external connector provides the lamp with high resistance to harsh environmental conditions. The design of the lamp allows you to adjust the lighting angle of the two extreme modules, so there is the possibility of precise lighting of selected parts of the object. Suitable for suspended mounting. Options: any RAL color.

### APPLICATION

The multi-purpose LED luminaire has been designed for use in areas requiring high dust and water resistance. It is especially recommended for use in rooms intended for medical and laboratory purposes as well as in industrial premises.


# INDUSTRY IP66 LED MR 1450MM 51000LM 840 (318W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	318	Impact resistance:	IK08
Index:	552625	Ingress protection:	IP66
Light source:	LED module	Mounting version:	suspended
Colour temperature [K]:	4000	Working temperature [°C]:	from -15 to +35
Luminous flux [lm]:	51000	Net weight [kg]:	9.900
Rated power of the luminaire [W]:	345.90	Warranty [years]:	5
Supply voltage [V]:	220-240	Category type:	battens
Frequency [Hz]:	50 - 60	AC voltage range [V]:	198 - 264
Beam angle [°]:	110	DC voltage range [V]:	176 - 280
Dimensions (H/W/T/S) [mm]:	1450/205/125	LED lifespan L70B50 [h]:	108000
Energy efficiency class:	C	LED lifespan L80B20 [h]:	71000
Luminous efficacy [lm/W]:	148	LED lifespan L90B10 [h]:	33000
Electrical protection class:	I	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour rendering index:	>80	The number of implement units:	3
SDCM:	≤ 3	Warranty [years]:	5
Diffuser material:	glass	CE certificate:	<a href="#">148/2023</a>
Material of the body:	aluminium	Manual:	<a href="#">Download PDF</a>
Colour of the body:	grey	Plik LDT:	<a href="#">Download</a>


## LIGHT CURVES

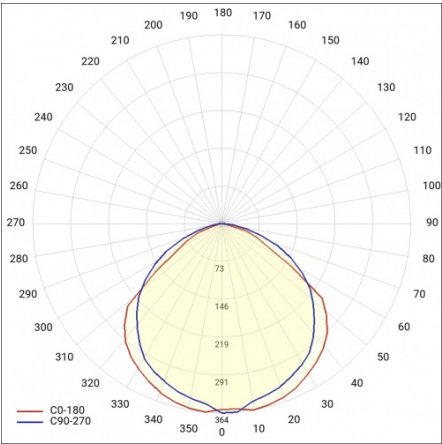

# INDUSTRY IP66 LED MR 1450MM 51000LM 840 (318W)

DETAILED CARD

## TECHNICAL DETAILS



INDUSTRY IP66 LED MR 2

Card creation date:19 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric andelectronic waste equipment regulations (WEEE).



Certificate CE - Nr: 148/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl