
# TERRA 2 LED LONG N X4 1195X170MM 8400LM 840 WHITE MAT (72W)

DETAILED CARD

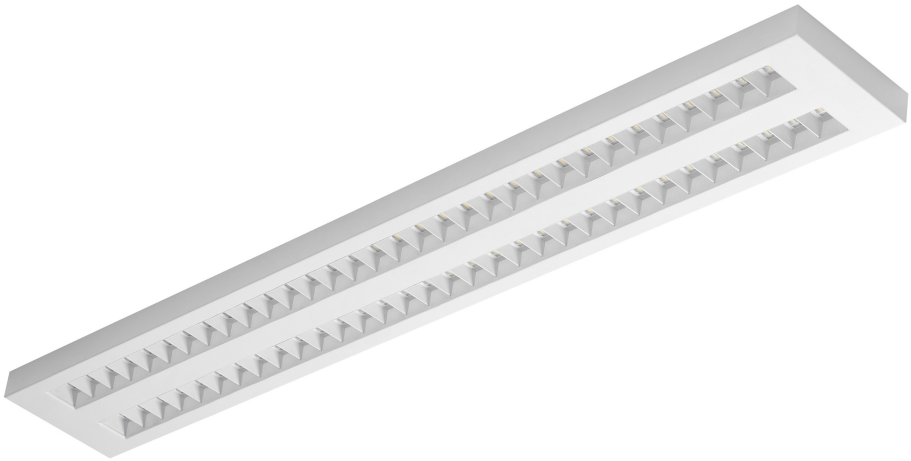

## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 226441 |
| **Ingress protection:** | IP20 |
| **Nominal power [W]:** | 72 |
| **Luminous flux [lm]*:** | 8400 |
| **Color rendering index (Ra) >:** | 80 |
| **SDCM:** | 3 |
| **Material of the body:** | powder coated steel |
| **Mounting version:** | surface |
| **Dimensions (H/W/T/S) [mm]:** | 1195/170/36 |
| **Warranty [years]:** | 5 |

## CHARACTERISTICS

LED luminaire with high total luminous Flux. Made of powder-coated white steel sheet. The luminaire has a patented HE reflector installed, which ensures efficiency and effectively eliminates glare. Available mounting versions: surface mounted, surface mounted on neodymium magnets (magnet ver. / N-MAG), flush-mounted in modular or KG ceilings (using an adapter) or suspended. In the surface-mounted version, solutions influencing the speed and safety of installation were used. In addition, the versions with neodymium magnets shorten the installation time of surface-mounted versions to an absolute minimum.

## APPLICATION

General purpose surface mounted luminaire for indoor application in offices or other utility rooms. Appropriate as the main light source even when the work requires eyesight concentration.

# TERRA 2 LED LONG N X4 1195X170MM 8400LM 840 WHITE MAT (72W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | |
|---|---|
| **Index:** | 226441 |
| **Light source:** | LED module |
| **Nominal power [W]:** | 72 |
| **Rated power of the luminaire [W]:** | 80 |
| **Supply voltage [V]:** | 220-240 |
| **Luminous flux [lm]:** | 8400 |
| **Luminous efficacy [lm/W]:** | 106 |
| **Energy efficiency class:** | E |
| **Electrical protection class:** | II |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 80 |
| **SDCM:** | 3 |
| **Power factor:** | 0.96 |
| **Optics:** | HE |
| **Material of the body:** | powder coated steel |
| **Colour of the body:** | white mat |
| **Dimensions (H/W/T/S) [mm]:** | 1195/170/36 |
| **Ingress protection:** | IP20 |

| | |
|---|---|
| **Mounting version:** | surface |
| **Working temperature [°C]:** | from 0 to +35 |
| **Category type:** | troffers |
| **Category of application:** | educational institutions, commercial facilities |
| **Version:** | 2x2 |
| **AC voltage range [V]:** | 220 - 240 |
| **UGR (4H8H):** | <16,7 |
| **LED lifespan L70B50 [h]:** | 132000 |
| **LED lifespan L80B10 [h]:** | 84000 |
| **LED lifespan L90B10 [h]:** | 42000 |
| **Photobiological safety:** | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| **Warranty [years]:** | 5 |
| **CE certificate:** | 354/2023 |
| **Environmental Product Declaration (EPD):** | 869/2025 |
| **Manual:** | Download PDF |
| **ISO Certificates:** | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |
| **Plik LDT:** | Download |

Card creation date: 24 July 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 354/2023

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl