


MAGNUM FUTURE 20W 120ST 42-48V CEE

DETAILED CARD

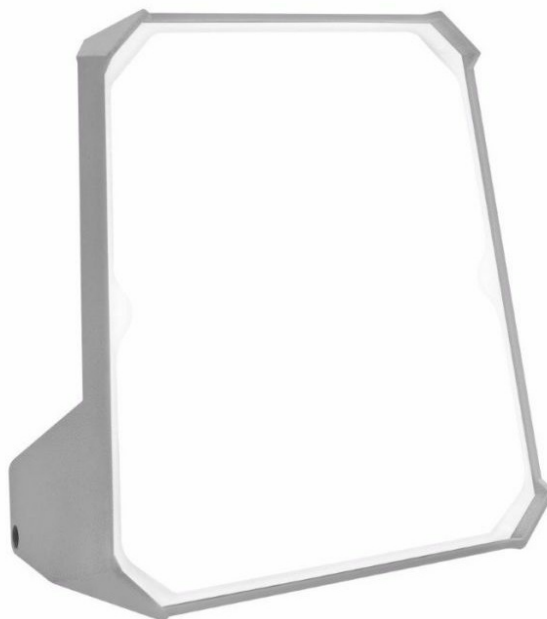

TECHNICAL PARAMETERS

Index:	248450
Ingress protection:	IP44
Impact resistance:	IK10
Nominal power [W]:	20
Colour temperature [K]:	4000
Luminous flux [lm]*:	2300
Supply voltage [V]:	42-48
Electrical protection class:	III
Material of the body:	PP
Colour of the body:	grey

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylene (PP). Anti-glare diffuser which transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included.

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

MAGNUM FUTURE 20W 120ST 42-48V CEE

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	20	Material of the body:	PP
Light source:	LED module	Ingress protection:	IP44
Colour temperature [K]:	4000	Colour of the body:	grey
Luminous flux [lm]:	2300	Impact resistance:	IK10
Plug type:	CEE	Net weight [kg]:	1
Supply voltage [V]:	42-48	Index:	248450
Electrical protection class:	III	Category type:	workplace floodlights
Beam angle [°]:	120	Dimensions (H/W/T/S) [mm]:	192/193/123
Cable length [m]:	3	Energy efficiency class:	D
Diffuser material:	PC	ETIM class:	EC000347
Diffuser type:	frozen	CE certificate:	173/2023
		Manual:	Download PDF

MAGNUM FUTURE 20W 120ST 42-48V CEE

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
000737	FUTURE STAND Tripod with Click Head System
000720	Standard tripod



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)

Card creation date: 08 November 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 173/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl