


# MAGNUM FUTURE 20W 120ST Z GNIAZDEM SCHUKO

DETAILED CARD

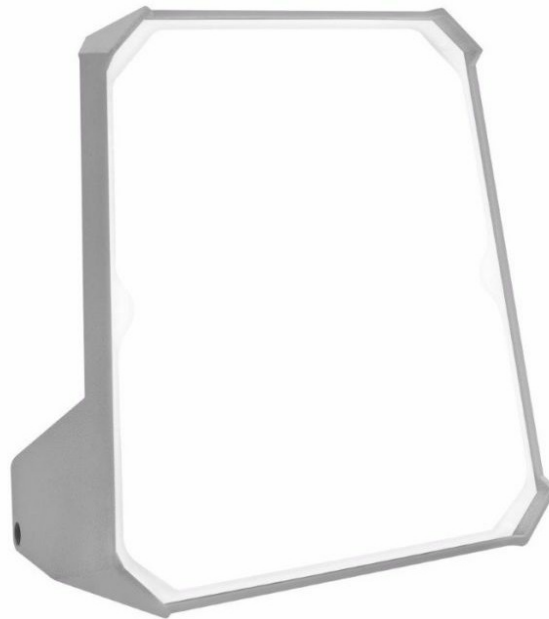

## TECHNICAL PARAMETERS

---

|                                     |         |
|-------------------------------------|---------|
| <b>Index:</b>                       | 248405  |
| <b>Ingress protection:</b>          | IP54    |
| <b>Impact resistance:</b>           | IK10    |
| <b>Nominal power [W]:</b>           | 20      |
| <b>Colour temperature [K]:</b>      | 4000    |
| <b>Luminous flux [lm]*:</b>         | 2300    |
| <b>Supply voltage [V]:</b>          | 220-240 |
| <b>Electrical protection class:</b> | I       |
| <b>Material of the body:</b>        | PP      |
| <b>Colour of the body:</b>          | grey    |

## CHARACTERISTICS

---

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylene (PP). Anti-glare diffuser which transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included.

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

## APPLICATION

---

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

# MAGNUM FUTURE 20W 120ST Z GNIAZDEM SCHUKO

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                              |            |                            |                              |
|------------------------------|------------|----------------------------|------------------------------|
| Light source:                | LED module | Plug type:                 | UNI-SCHUKO                   |
| Nominal power [W]:           | 20         | Socket type:               | SCHUKO                       |
| Colour temperature [K]:      | 4000       | Sockets:                   | 1                            |
| Luminous flux [lm]:          | 2300       | Cable length [m]:          | 3                            |
| Supply voltage [V]:          | 220-240    | Net weight [kg]:           | 1                            |
| Electrical protection class: | I          | Index:                     | 248405                       |
| Beam angle [°]:              | 120        | Category type:             | workplace floodlights        |
| Diffuser material:           | PC         | Dimensions (H/W/T/S) [mm]: | 192/193/123                  |
| Diffuser type:               | frozen     | Energy efficiency class:   | D                            |
| Material of the body:        | PP         | ETIM class:                | EC000346                     |
| Colour of the body:          | grey       | CE certificate:            | <a href="#">173/2023</a>     |
| Impact resistance:           | IK10       | Manual:                    | <a href="#">Download PDF</a> |
| Ingress protection:          | IP54       |                            |                              |

# MAGNUM FUTURE 20W 120ST Z GNIAZDEM SCHUKO

DETAILED CARD

## ACCESSORIES AVAILABLE

| index  | Name                                       |
|--------|--|
| 000737 | FUTURE STAND Tripod with Click Head System |
| 000720 | Standard tripod                            |



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)

Card creation date: 08 November 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 173/2023