
MAGNUM FUTURE 20W 45 ST Z GNIAZDEM PL-FR

DETAILED CARD

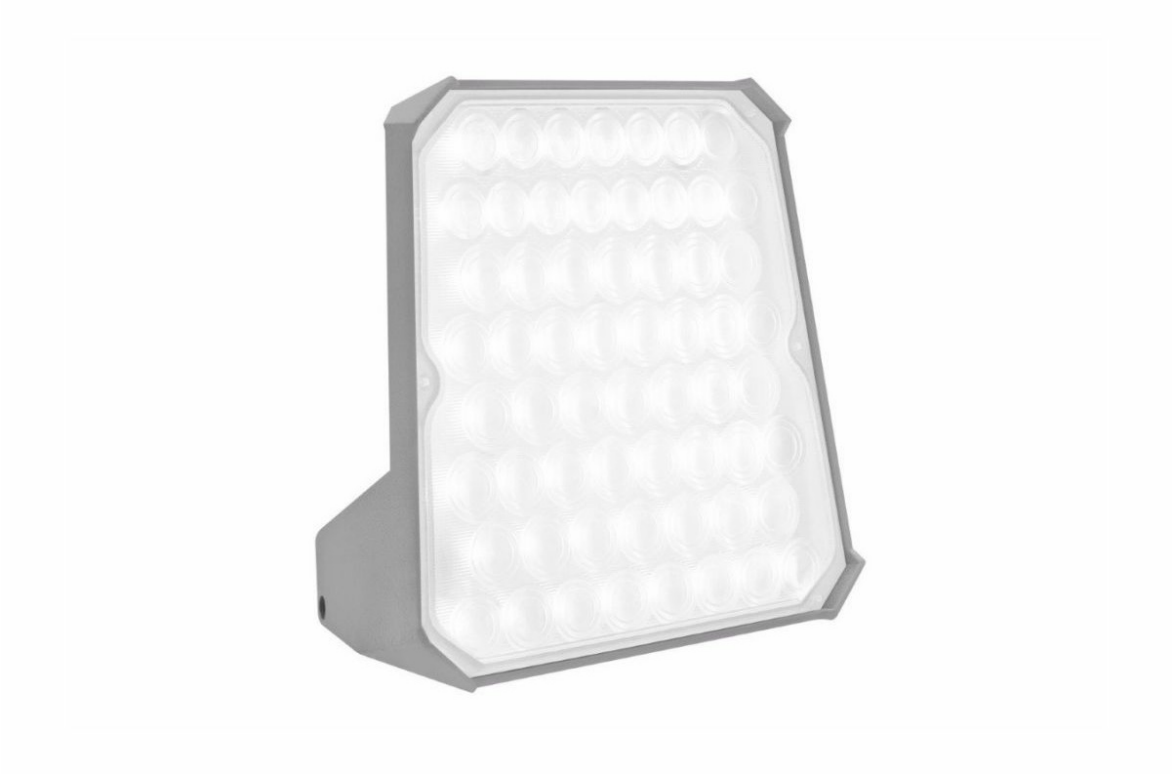

TECHNICAL PARAMETERS

Index:	248535
Ingress protection:	IP54
Impact resistance:	IK10
Nominal power [W]:	20
Colour temperature [K]:	4000
Luminous flux [lm]*:	2300
Supply voltage [V]:	220-240
Electrical protection class:	I
Material of the body:	PP
Colour of the body:	grey

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylene (PP). Anti-glare diffuser which transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included.
It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

MAGNUM FUTURE 20W 45 ST Z GNIAZDEM PL-FR

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module
Nominal power [W]:	20
Colour temperature [K]:	4000
Luminous flux [lm]:	2300
Supply voltage [V]:	220-240
Electrical protection class:	I
Beam angle [°]:	45
Diffuser material:	PC
Diffuser type:	frozen
Material of the body:	PP
Colour of the body:	grey
Impact resistance:	IK10
Ingress protection:	IP54

Plug type:	UNI-SCHUKO
Socket type:	PL-FR
Sockets:	1
Cable length [m]:	3
Net weight [kg]:	1
Index:	248535
Category type:	workplace floodlights
Dimensions (H/W/T/S) [mm]:	192/193/123
Energy efficiency class:	D
ETIM class:	EC000347
CE certificate:	173/2023
Manual:	Download PDF

MAGNUM FUTURE 20W 45 ST Z GNIAZDEM PL-FR


DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
000737	FUTURE STAND Tripod with Click Head System
000720	Standard tripod



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 173/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl