
MAGNUM FUTURE ACCU 20W

DETAILED CARD



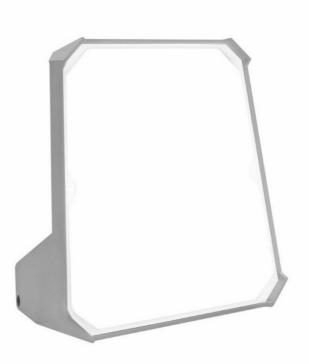

TECHNICAL PARAMETERS

Index:	248511
Ingress protection:	IP54/20
Impact resistance:	IK10
Nominal power [W]:	20
Colour temperature [K]:	4000
Luminous flux [lm]*:	2000
Supply voltage [V]:	220-240
Energy efficiency class:	Е
Electrical protection class:	II
Material of the body:	PP

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polipropylene (PP). Anti-glare diffuser made od polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.



MAGNUM FUTURE ACCU 20W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source: LED module Rated power of the luminaire [W]: 21 Colour temperature [K]: 4000 Luminous flux [Im]: 2000 Supply voltage [V]: 220-240 Frequency [Hz]: 50 - 60 Energy efficiency class: E Electrical protection class: II Colour rendering index: 80 SDCM: ≤ 3 Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white Material of the body: PP		
Colour temperature [K]: 4000 Luminous flux [Im]: 2000 Supply voltage [V]: 220-240 Frequency [Hz]: 50 - 60 Energy efficiency class: E Electrical protection class: II Colour rendering index: 80 SDCM: ≤ 3 Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	Light source:	LED module
Luminous flux [Im]: 2000 Supply voltage [V]: 220-240 Frequency [Hz]: 50 - 60 Energy efficiency class: E Electrical protection class: II Colour rendering index: 80 SDCM: ≤ 3 Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	Rated power of the luminaire [W]:	21
Supply voltage [V]: 220-240 Frequency [Hz]: 50 - 60 Energy efficiency class: E Electrical protection class: II Colour rendering index: 80 SDCM: ≤ 3 Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	Colour temperature [K]:	4000
Frequency [Hz]: 50 - 60 Energy efficiency class: E Electrical protection class: II Colour rendering index: 80 SDCM: ≤ 3 Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	Luminous flux [Im]:	2000
Energy efficiency class: Electrical protection class: Colour rendering index: SDCM: SDCM: Sam angle [°]: Beam angle [°]: Battery: Li-lon 18,5V Battery capacity [mAh]: Diffuser material: PC Diffuser type: Diffuser colour:	Supply voltage [V]:	220-240
Electrical protection class:	Frequency [Hz]:	50 - 60
Colour rendering index: 80 SDCM: ≤ 3 Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	Energy efficiency class:	E
SDCM: ≤ 3 Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	Electrical protection class:	II
Beam angle [°]: 120 Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	Colour rendering index:	80
Battery: Li-lon 18,5V Battery capacity [mAh]: 2000 Diffuser material: PC Diffuser type: frozen Diffuser colour: white	SDCM:	≤3
Battery capacity [mAh]: Diffuser material: PC Diffuser type: prozen white	Beam angle [°]:	120
Diffuser material: Diffuser type: prozen prozen white	Battery:	Li-lon 18,5V
Diffuser type: frozen Diffuser colour: white	Battery capacity [mAh]:	2000
Diffuser colour: white	Diffuser material:	PC
	Diffuser type:	frozen
Material of the body:	Diffuser colour:	white
	Material of the body:	PP

Colour of the body:	grey
Dimensions (H/W/T/S) [mm]:	192/193/123
Impact resistance:	IK10
Ingress protection:	IP54/20
Working temperature [°C]:	from 0 to +25
Wire type:	PCV
Cable length [m]:	2
Switch:	yes
Net weight [kg]:	1.100
Warranty [years]:	2
Index:	248511
EAN:	5905963248511
Category type:	workplace floodlights
LED lifespan L70B50 [h]:	50000
ETIM class:	EC000347
Manual:	Download PDF



MAGNUM FUTURE ACCU 20W

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
000737	FUTURE STAND Tripod with Click Head System
000720	Standard tripod
315039	Set of magnets for Magnum XS (2 pcs.)





FUTURE STAND Tripod with Click Head System (000737)

Standard tripod (000720)

Card creation date: 04 August 2021



