
MAGNUM FUTURE ACCU 20W 45 ST

DETAILED CARD

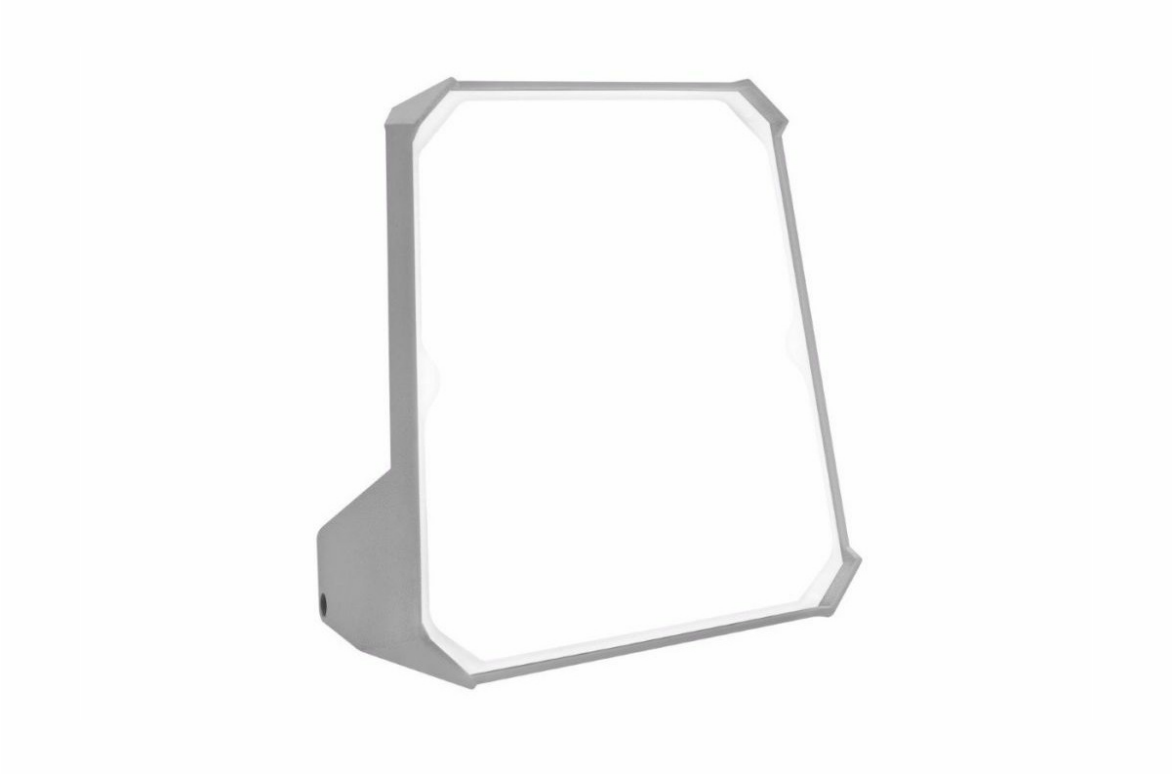

TECHNICAL PARAMETERS

Index:	248818
Ingress protection:	IP54/20
Impact resistance:	IK10
Nominal power [W]:	20
Colour temperature [K]:	4000
Luminous flux [lm]*:	2000
Supply voltage [V]:	220-240
Energy efficiency class:	E
Electrical protection class:	II
Material of the body:	PP

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polipropylene (PP). Anti-glare diffuser made od polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.
It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

MAGNUM FUTURE ACCU 20W 45 ST

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module
Rated power of the luminaire [W]:	21
Colour temperature [K]:	4000
Luminous flux [lm]:	2000
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Energy efficiency class:	E
Electrical protection class:	II
Color rendering index (Ra) >:	80
SDCM:	3
Beam angle [°]:	45
Battery:	Li-Ion 18,5V
Battery capacity [mAh]:	2000
Diffuser material:	PC
Diffuser type:	frozen
Diffuser colour:	white
Material of the body:	PP

Colour of the body:	grey
Dimensions (H/W/T/S) [mm]:	192/193/123
Impact resistance:	IK10
Ingress protection:	IP54/20
Working temperature [°C]:	from 0 to +25
Wire type:	PCV
Cable length [m]:	2
Switch:	yes
Net weight [kg]:	1.100
Warranty [years]:	2
Index:	248818
EAN:	5905963248818
Category type:	workplace floodlights
LED lifespan L70B50 [h]:	50000
ETIM class:	EC000347
Manual:	Download PDF

MAGNUM FUTURE ACCU 20W 45 ST


DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
000737	FUTURE STAND Tripod with Click Head System
000720	Standard tripod
315039	Set of magnets for Magnum XS (2 pcs.)



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)

Card creation date: 04 August 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 174/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl