
# **MAGNUM FUTURE ACCU 20W 45 ST**

**DETAILED CARD** 



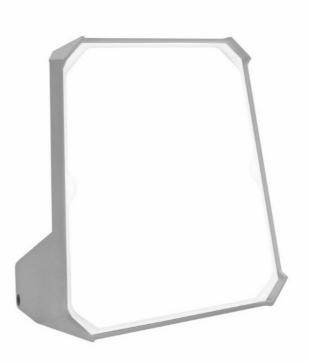

## **TECHNICAL PARAMETERS**

| Index:                       | 248818  |
|------------------------------|---------|
| Ingress protection:          | IP54/20 |
| Impact resistance:           | IK10    |
| Nominal power [W]:           | 20      |
| Colour temperature [K]:      | 4000    |
| Luminous flux [lm]*:         | 2000    |
| Supply voltage [V]:          | 220-240 |
| Energy efficiency class:     | Е       |
| Electrical protection class: | II      |
| Material of the body:        | PP      |
|                              |         |

### **CHARACTERISTICS**

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polipropylene (PP). Anti-glare diffuser made od polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

### **APPLICATION**

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.



# **MAGNUM FUTURE ACCU 20W 45 ST**

**DETAILED CARD** 

### **TECHNICAL PARAMETERS TABLE**

| Nominal power [W]:                | 20           |
|-----------------------------------|--------------|
| Light source:                     | LED module   |
| Colour temperature [K]:           | 4000         |
| Rated power of the luminaire [W]: | 21           |
| Luminous flux [lm]:               | 2000         |
| Beam angle [°]:                   | 45           |
| Supply voltage [V]:               | 220-240      |
| Frequency [Hz]:                   | 50 - 60      |
| Cable length [m]:                 | 2            |
| Switch:                           | yes          |
| Energy efficiency class:          | E            |
| Electrical protection class:      | II           |
| Colour rendering index:           | >80          |
| SDCM:                             | ≤3           |
| Battery:                          | Li-lon 18,5V |
| Battery capacity [mAh]:           | 2000         |
| Diffuser material:                | PC           |

| Diffuser type:             | frozen                |
|----------------------------|-----------------------|
| Diffuser colour:           | white                 |
| Material of the body:      | PP                    |
| Colour of the body:        | grey                  |
| Dimensions (H/W/T/S) [mm]: | 192/193/123           |
| Impact resistance:         | IK10                  |
| Ingress protection:        | IP54/20               |
|                            | from 0 to +25         |
| Working temperature [°C]:  |                       |
| Wire type:                 | PCV                   |
| Net weight [kg]:           | 1.100                 |
| Warranty [years]:          | 2                     |
| Index:                     | 248818                |
| EAN:                       | 5905963248818         |
| Category type:             | workplace floodlights |
| LED lifespan L70B50 [h]:   | 50000                 |
| ETIM class:                | EC000347              |
| Manual:                    | Download PDF          |



# **MAGNUM FUTURE ACCU 20W 45 ST**

**DETAILED CARD** 

### **ACCESSORIES AVAILABLE**

| index  | Name                                       |
|--------|--|
| 000737 | FUTURE STAND Tripod with Click Head System |
| 000720 | Standard tripod                            |
| 315039 | Set of magnets for Magnum XS (2 pcs.)      |





FUTURE STAND Tripod with Click Head System (000737)

Standard tripod (000720)

Card creation date: 04 August 2021



