

DIONE LED PLUS 2550LM 840 IP65 I KL. OPAL WHITE VANDALPROOF 22W

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---------------------------------|--------|
| Index: | 940620 |
| Ingress protection: | IP65 |
| Impact resistance: | IK10 |
| Nominal power [W]: | 22 |
| Luminous flux [lm]*: | 2550 |
| Colour temperature [K]: | 4000 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | E |
| Material of the body: | ABS |
| Ring material: | ABS |

CHARACTERISTICS

Designed from scratch surface mounted, round LED luminaire with integrated, energy-saving LED panel. The fitting introduces new solutions to improve the light distribution and balance of the temperatures. It is characterized by high lighting efficiency and very high IP65 ingress protection. Specially profiled diffuser made of vandal-resistant PC allows keeping the highest degree of impact resistance IK10. It uses a number of proven solutions affecting the speed and ease of the assembly (suspension kit for the diffuser, readiness for through wiring) and component security: diffuser integrated with LED panel. Also available is a body made of ASA material, with excellent UV resistance, suitable for outdoor use. The ceiling ring is used to cover the gap between the luminaire and the surface on which it is mounted. The accessory can be used in prison cells.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency, and optimal use of electricity (Power Factor).

The fitting is offered in RCR version:

- sensor used to detect motion; for detection uses microwaves (active sensor).

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes) or outdoor. It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.

DIONE LED PLUS 2550LM 840 IP65 I KL. OPAL WHITE


VANDALPROOF 22W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|-----------------|--------------------------------------|---|
| Nominal power [W]: | 22 | Dimensions of single box [mm]: | 340/340/115 |
| Light source: | LED module | Net weight [kg]: | 42370 |
| Colour temperature [K]: | 4000 | Gross weight [kg]: | 12420 |
| Luminous flux [lm]: | 2550 | Warranty [years]: | 5 |
| Rated power of the luminaire [W]: | 24 | Permeability factor of the diffuser: | 0.73 |
| Supply voltage [V]: | 220-240 | Index: | 940620 |
| Frequency [Hz]: | 50 - 60 | EAN: | 950377 |
| Luminous efficacy [lm/W]: | 103 | Category type: | bulkheads |
| Energy efficiency class: | E | AC voltage range [V]: | 220-240 |
| Electrical protection class: | I | LED lifespan L70B50 [h]: | 110000 |
| Colour rendering index: | >80 | LED lifespan L80B20 [h]: | 84000 |
| SDCM: | ≤ 3 | LED lifespan L90B10 [h]: | 33000 |
| Power factor: | 0.94 | Light distribution type: | open space |
| Beam angle [°]: | 120 | CE certificate: | 377/2023 |
| Diffuser material: | PC | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Diffuser type: | OPAL | Optics material: | ABS |
| Diffuser colour: | white | Vandalproof: | yes |
| Material of the body: | ABS | Manual: | Download PDF |
| Colour of the body: | white | PZH certificate: | B-BK-60212-0619/20 |
| Ring material: | ABS | ENEC Certificate: | PL BBJ/011/2021 |
| Ring colour: | white | Plik LDT: | Download |
| Dimensions (H/W/T/S) [mm]: | ø340/115 | | |
| Impact resistance: | IK10 | | |
| Ingress protection: | IP65 | | |
| Working temperature [°C]: | from -20 to +35 | | |

LIGHT CURVES

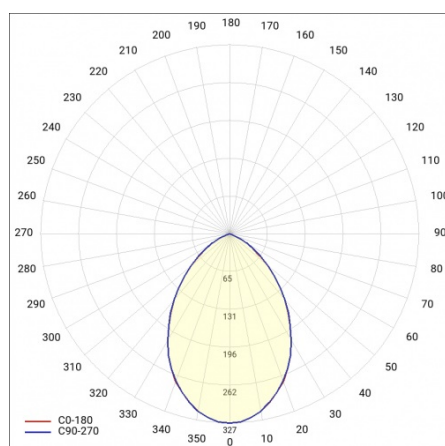

DIONE LED PLUS 2550LM 840 IP65 I KL. OPAL WHITE VANDALPROOF 22W

DETAILED CARD

ACCESSORIES AVAILABLE

| index | Name |
|----------|---|
| 120DL118 | Ceiling ring Dione LED steel 1.5 white matt RAL 9003 painted vandal resistant |



Ceiling ring Dione LED steel 1.5 white
matt RAL 9003 painted vandal
resistant (120DL118)

Card creation date: 10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 377/2023