


# SQ 300 LED PLUS LENS 2100LM 830 IP54 II KL. DALI RCR OPAL RAL9005 (24W) 300MM CORRIDOR

DETAILED CARD

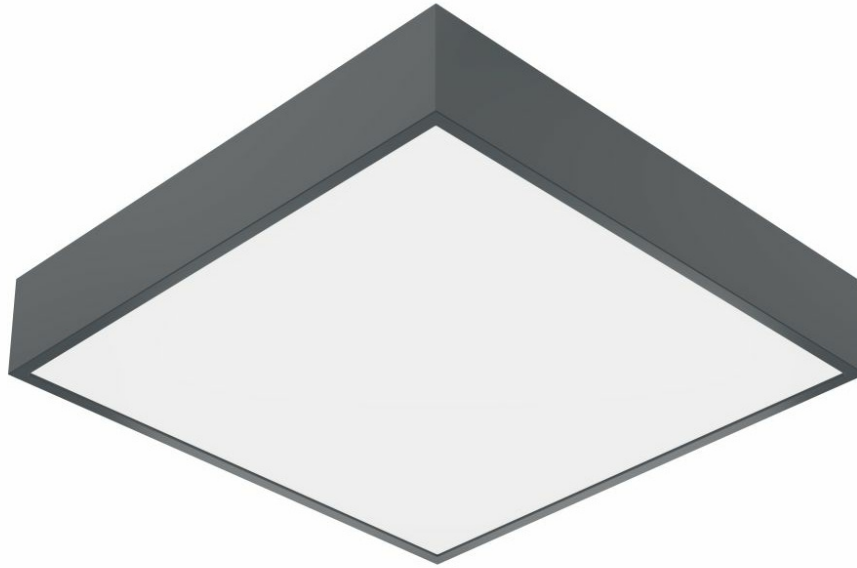

## TECHNICAL PARAMETERS

<b>Index:</b>	664342
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK08
<b>Nominal power [W]:</b>	24
<b>Luminous flux [lm]*:</b>	2100
<b>Colour temperature [K]:</b>	3000
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PS
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

SQ 300 LED is a new line of square ceiling lamps. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, thanks to which it is characterized by low weight and high impact resistance (IK08). The diffuser made of PC polycarbonate provides the lamp with excellent lighting properties. Integrated LED module provides low power consumption and all the advantages of modern lamps with an LED source. The PLUS version of the luminaire line is equipped with brand components from recognized global manufacturers. It is characterized by extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

## APPLICATION

The surface-mounted lamp for ceiling or wall mounting is intended for both indoor use - in rooms with high humidity, passageways, staircases, and outdoor use as façade lighting.


# SQ 300 LED PLUS LENS 2100LM 830 IP54 II KL. DALI RCR OPAL RAL9005 (24W) 300MM CORRIDOR

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	24	Mounting version:	surface
Index:	664342	Dimensions of single box [mm]:	305x305x60
Colour temperature [K]:	3000	Net weight [kg]:	1
Light source:	LED module	Warranty [years]:	5
Luminous flux [lm]:	2100	Category type:	bulkheads
Rated power of the luminaire [W]:	27	Category of application:	HoReCa, commercial facilities, educational institutions
Diffuser type:	OPAL	AC voltage range [V]:	198 - 264
Supply voltage [V]:	220 - 240	LED lifespan L70B50 [h]:	120000
Motion sensor:	yes	LED lifespan L80B20 [h]:	80000
Frequency [Hz]:	50 - 60	LED lifespan L90B10 [h]:	40000
DIMM DALI:	yes	Light distribution type:	open space
Corridor function:	yes	SDCM:	≤ 3
Colour of the body:	black	Power factor:	0.92
Luminous efficacy [lm/W]:	85	Max load (RCR) [W]:	400
Energy efficiency class:	F	Surge protection [kV]:	1
Electrical protection class:	II	Working temperature [°C]:	from -20 to +35
Beam angle [°]:	120	Permeability factor of the diffuser:	0.70
Diffuser material:	PS	DC voltage range [V]:	176 - 280
Diffuser colour:	white	Version:	LENS
Optics material:	PMMA	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Optics:	lens	Warranty [years]:	5
Material of the body:	ABS	ENEC Certificate:	<a href="#">0316/ENEC/23</a>
Dimensions (H/W/T/S) [mm]:	300/300/58	CE certificate:	<a href="#">111/2023</a>
Mounting dimensions [mm]:	210	PZH certificate:	<a href="#">B-BK-60212-0479/21</a>
Impact resistance:	IK08	Manual:	<a href="#">Download PDF</a>
Ingress protection:	IP54	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

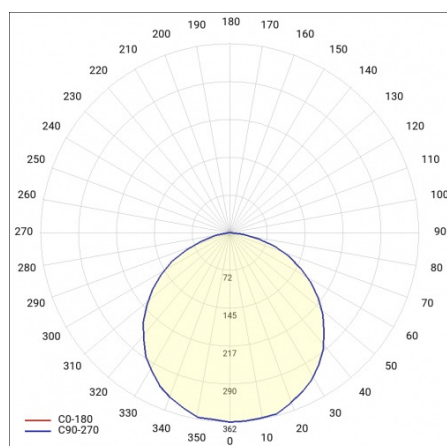

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 111/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)