


# SQ 300 LED PLUS LENS 2100LM 830 IP54 II KL. DALI RCR OPAL RAL9005 (24W) 300MM CORRIDOR

DETAILED CARD

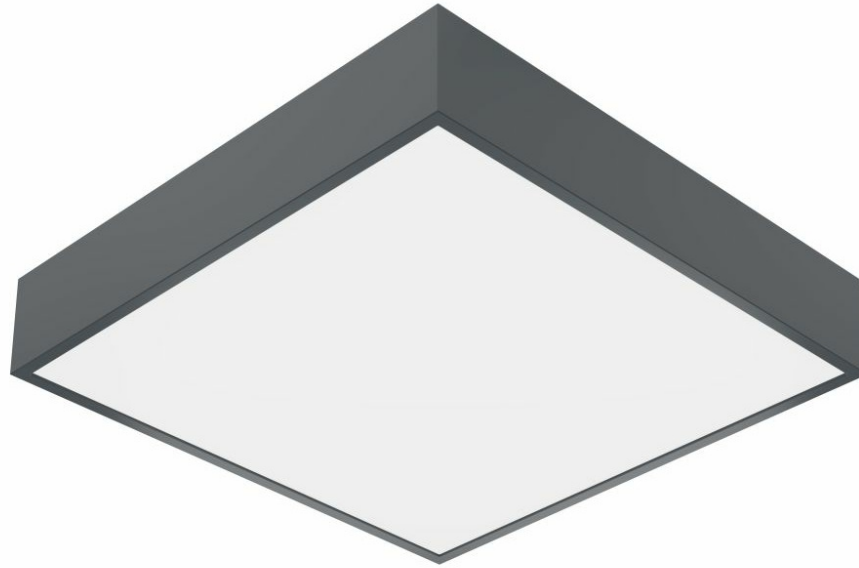

## TECHNICAL PARAMETERS

|                                 |        |
|---------------------------------|--------|
| <b>Index:</b>                   | 664342 |
| <b>Ingress protection:</b>      | IP54   |
| <b>Impact resistance:</b>       | IK08   |
| <b>Nominal power [W]:</b>       | 24     |
| <b>Luminous flux [lm]*:</b>     | 2100   |
| <b>Colour temperature [K]:</b>  | 3000   |
| <b>Energy efficiency class:</b> | F      |
| <b>Material of the body:</b>    | ABS    |
| <b>Diffuser material:</b>       | PS     |
| <b>Diffuser type:</b>           | OPAL   |

## CHARACTERISTICS

SQ 300 LED is a new line of square ceiling lamps. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, thanks to which it is characterized by low weight and high impact resistance (IK08). The diffuser made of PC polycarbonate provides the lamp with excellent lighting properties. Integrated LED module provides low power consumption and all the advantages of modern lamps with an LED source. The PLUS version of the luminaire line is equipped with brand components from recognized global manufacturers. It is characterized by extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

## APPLICATION

The surface-mounted lamp for ceiling or wall mounting is intended for both indoor use - in rooms with high humidity, passageways, staircases, and outdoor use as façade lighting.


# SQ 300 LED PLUS LENS 2100LM 830 IP54 II KL. DALI RCR OPAL RAL9005 (24W) 300MM CORRIDOR

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |            |                                      |   |
|-----------------------------------|------------|--------------------------------------|---|
| Nominal power [W]:                | 24         | Mounting version:                    | surface   |
| Index:                            | 664342     | Dimensions of single box [mm]:       | 305x305x60  |
| Colour temperature [K]:           | 3000       | Net weight [kg]:                     | 1   |
| Light source:                     | LED module | Warranty [years]:                    | 5   |
| Luminous flux [lm]:               | 2100       | Category type:                       | bulkheads   |
| Rated power of the luminaire [W]: | 27         | Category of application:             | HoReCa, commercial facilities, educational institutions |
| Diffuser type:                    | OPAL       | AC voltage range [V]:                | 198 - 264   |
| Supply voltage [V]:               | 220 - 240  | LED lifespan L70B50 [h]:             | 120000  |
| Motion sensor:                    | yes        | LED lifespan L80B20 [h]:             | 80000   |
| Frequency [Hz]:                   | 50 - 60    | LED lifespan L90B10 [h]:             | 40000   |
| DIMM DALI:                        | yes        | Light distribution type:             | open space  |
| Corridor function:                | yes        | SDCM:                                | ≤ 3   |
| Colour of the body:               | black      | Power factor:                        | 0.92  |
| Luminous efficacy [lm/W]:         | 85         | Max load (RCR) [W]:                  | 400   |
| Energy efficiency class:          | F          | Surge protection [kV]:               | 1   |
| Electrical protection class:      | II         | Working temperature [°C]:            | from -20 to +35   |
| Beam angle [°]:                   | 120        | Permeability factor of the diffuser: | 0.70  |
| Diffuser material:                | PS         | DC voltage range [V]:                | 176 - 280   |
| Diffuser colour:                  | white      | Version:                             | LENS  |
| Optics material:                  | PMMA       | Photobiological safety:              | RG0 - exempt (no photobiological hazard)                |
| Optics:                           | lens       | Warranty [years]:                    | 5   |
| Material of the body:             | ABS        | ENEC Certificate:                    | <a href="#">0316/ENEC/23</a>                            |
| Dimensions (H/W/T/S) [mm]:        | 300/300/58 | CE certificate:                      | <a href="#">111/2023</a>                                |
| Mounting dimensions [mm]:         | 210        | PZH certificate:                     | <a href="#">B-BK-60212-0479/21</a>                      |
| Impact resistance:                | IK08       | Manual:                              | <a href="#">Download PDF</a>                            |
| Ingress protection:               | IP54       | Plik LDT:                            | <a href="#">Download</a>                                |

## LIGHT CURVES

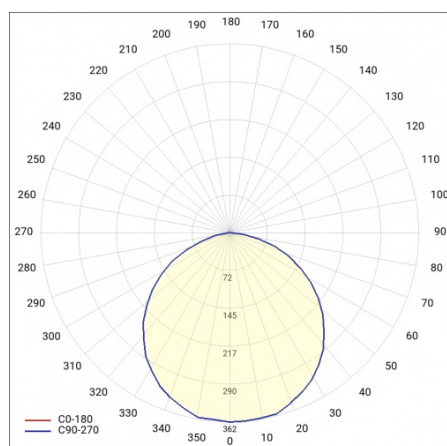

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 111/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)