

RQ 160 LED P 2800LM 75DEG 840 (21W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	570148
Ingress protection:	IP44/20
Nominal power [W]:	21
Luminous flux [lm]*:	2800
Colour temperature [K]:	4000
Electrical protection class:	I
Energy efficiency class:	D
Material of the body:	ABS
Colour of the body:	white
Diffuser material:	PC

CHARACTERISTICS

RQ 160 LED P is a new line of round luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

APPLICATION

Recessed-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


RQ 160 LED P 2800LM 75DEG 840 (21W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	570148	Impact resistance:	IK08
Light source:	LED module	Ingress protection:	IP44/20
Nominal power [W]:	21	Glow wire test [°C]:	650
Rated power of the luminaire [W]:	22	Mounting version:	recessed
Supply voltage [V]:	220 - 240	Working temperature [°C]:	from -20 to +35
Frequency [Hz]:	50 - 60	Number on the palette [pcs]:	420
Luminous flux [lm]:	2800	Warranty [years]:	5
Luminous efficacy [lm/W]:	125	Flicker procent:	67
Energy efficiency class:	D	Luminous flux of the luminaire 0 min [lm]*:	2756
Electrical protection class:	I	ITHD [%]:	16
Colour temperature [K]:	4000	LED lifespan L70B50 [h]:	132000
Color rendering index (Ra) >:	80	LED lifespan L80B10 [h]:	84000
SDCM:	3	LED lifespan L90B10 [h]:	42000
Power factor:	0.99	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Beam angle [°]:	75	Warranty [years]:	5
Diffuser material:	PC	Category of application:	educational institutions, HoReCa, commercial facilities
Diffuser type:	OPAL	Manual:	Download PDF
Optics:	lens	CE certificate:	318/2023
Material of the body:	ABS	PZH certificate:	B-BK-60112-0365/2022
Colour of the body:	white	ISO Certificates:	9001:2015. 14001:2015. 45001:2018. 50001:2018
Dimensions (H/W/T/S) [mm]:	162/70	Plik LDT:	Download
Mounting dimensions [mm]:	150		

LIGHT CURVES

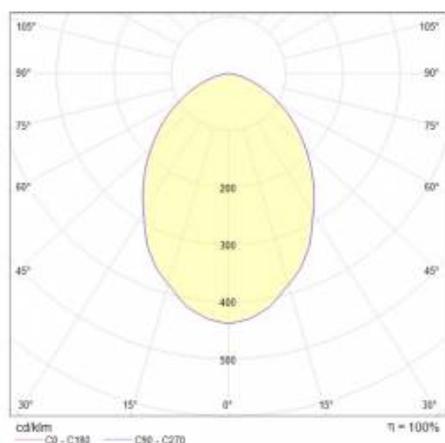

RQ 160 LED P 2800LM 75DEG 840 (21W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
897269	Cover frame for RQ160 D205mm white RAL 9003



Cover frame for RQ160 D205mm white
RAL 9003 (897269)

Card creation date: 10 February 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 318/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl